



# Quality







## **Quality** Rear Discharge Finish Mowers

Quality is an important word at King Kutter. It's who we are. It's what we do. It's the equipment we build. Landscapers, Nursery Owners, Farmers, and Homeowners can get the job done fast, and do a job they can be proud of, with a Finish Mower from King Kutter.

The grass will look better on your side of the fence when you cut it with a King Kutter Finish Mower. King Kutter Finish Mowers are built with the quality and features that will make your lawn the envy of the neighbors. Mowing has never been easier because of the *free-floating flex hitch system*. Uneven terrain? The *free-floating flex hitch system* follows the contour of the ground giving you a rich, smooth, manicured look. King Kutter Finish Mowers are designed with a 3/16" thick steel reinforced deck, 3 cast iron blade spindles with ball bearings, 1/4" thick heat treated blades and a 40 hp cast iron gearbox. King Kutter Finish Mowers are available in 4', 5' and 6' single belt designs for the homeowner and 6' and 7' double "V" belt design for larger lawns or light commercial use.



Engineered for Lawn Grass



Sturdy 3/16 in. Thick Deck





# yal Treatment



## Rear Discharge Finish Mower Features

### Choose from six models:

RFM-48 has a 48" Cutting Width, 1/4" x 2" x 16" Blade Size and a Blade Tip Speed of 14,373 FPM



RFM-60 has a 60" Cutting Width, 1/4" x 2" x 20" Blade Size and a Blade Tip Speed of 16,075 FPM

RFM-72 has a 72" Cutting Width, 1/4" x 2" x 24" Blade Size and a Blade Tip Speed of 16,535 FPM

RSFM-72 has a 72" Cutting Width, Double V-Belt Design, 1/4" x 2" x 24" Blade Size and a Blade Tip Speed of 16,535-FPM

RSFM-SS-84-FH has an 84" Cutting Width, Double V-Belt Design, 1/4" x 2" x 28" Blade Size and a Blade Tip Speed of 16,421 FPM, Stainless Steel Deck

RFM-48-XB is designed specifically for sub-compact tractors and has a 48" Cutting Width, 1/4" x 2" x 16" Blade Size and a Blade Tip Speed of 14,373 FPM

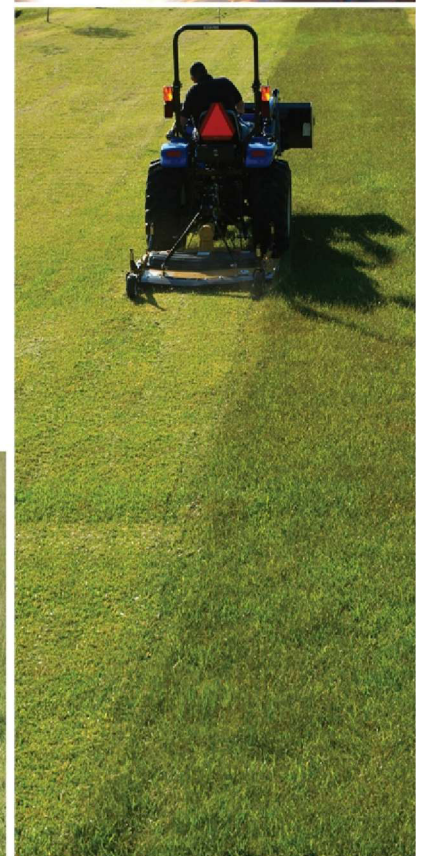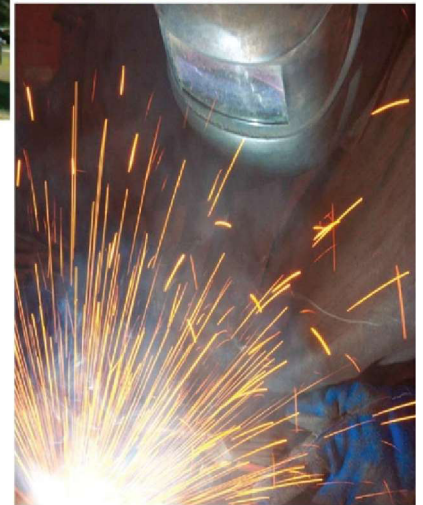

QuickHitch  
Compatible



Patented Flex Hitch Design




The Industries only Stainless Steel Finish Mower Deck (7 Ft. Only)





# Mowing Made Easy.

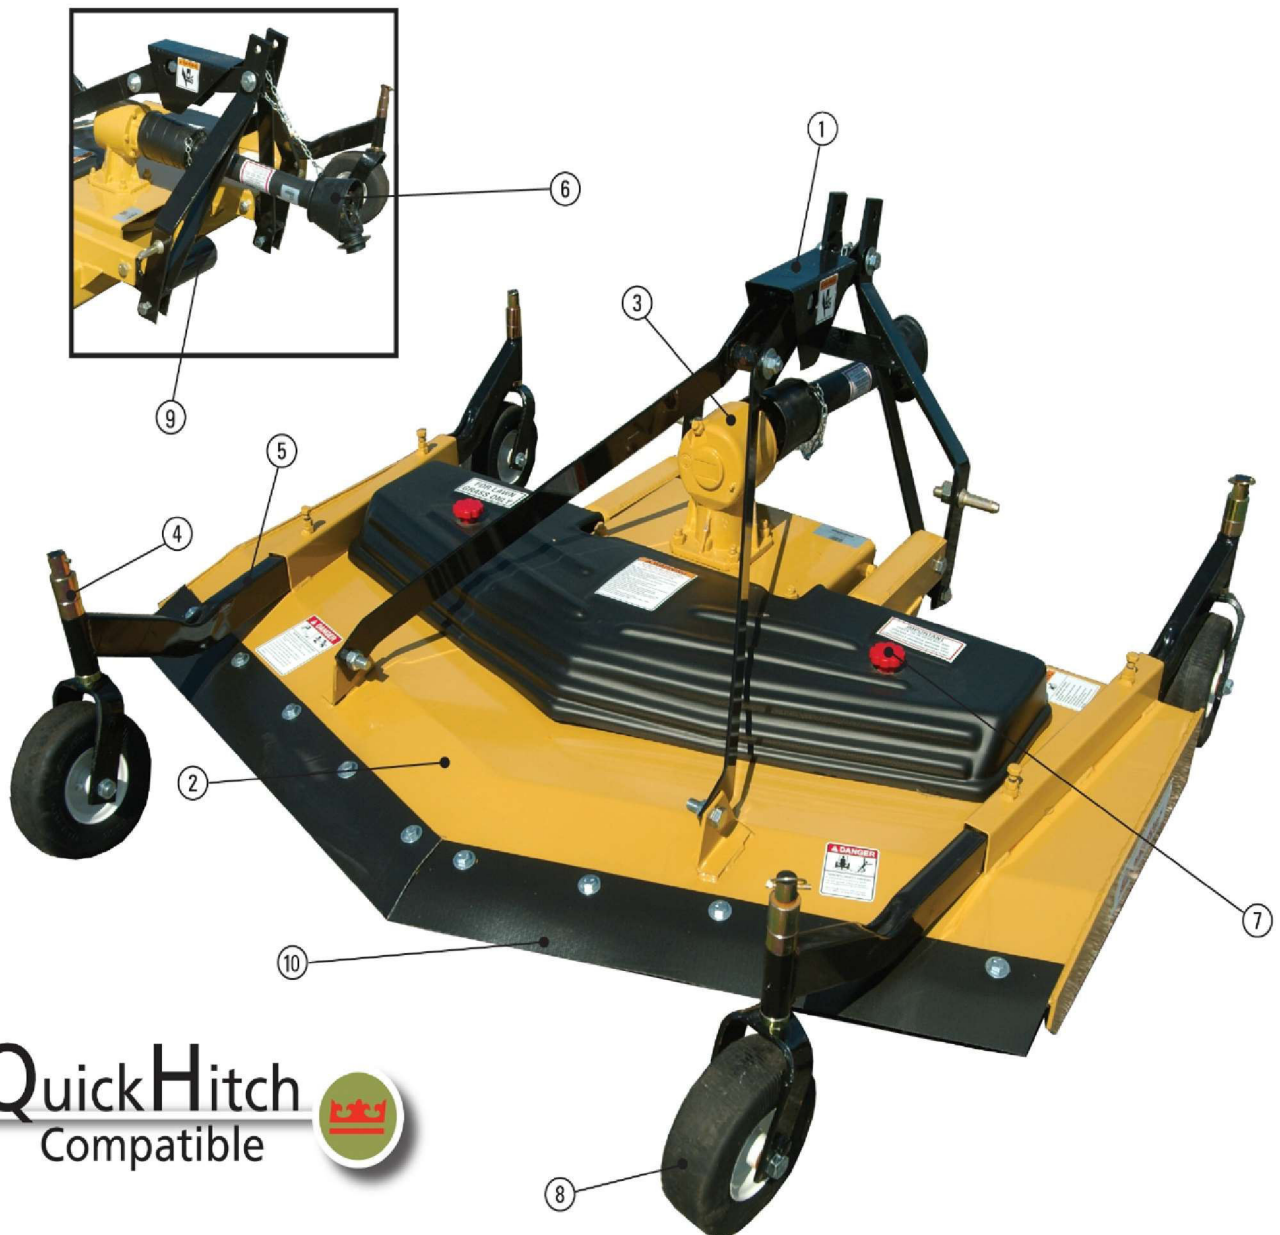

QuickHitch  
Compatible



## King Cutter Finish Mowers.

- |   |  |    |                                      |
|---|--|----|--------------------------------------|
| 1 | Cat. I Free-Floating Flex Hitch System     | 6  | Shielded PTO Shaft with Shear Pin    |
| 2 | Heavy Duty Fully Baffled Steel Deck        | 7  | Single Belt with EZ Adjustment       |
| 3 | Heavy Duty Cast Iron Gearbox               | 8  | Turf Friendly, 4-PLY Pneumatic Tires |
| 4 | Easy Height Adjustment (From 1" to 4 1/2") | 9  | Anti-Scalp Front Roller              |
| 5 | Uniquely Designed Tubular Wheel Arms       | 10 | Rubber Deflector Shield              |





The Perfect  
Finish Mower for Your  
Sub-Compact Tractor

King Kutter's XB Sub-Compact Finish Mowers are built with the quality and features that will make your lawn the envy of the neighbors. The *free-floating flex hitch system* allows the mower to follow the contour of the ground and the under deck baffling system helps distribute grass evenly. King Kutter XB Sub-Compact Finish Mowers are tough. A 3/16" reinforced deck, 3 cast iron blade spindles with ball bearings, a 40 HP cast iron gearbox and 1/4" thick heat treated blades give you years of dependable performance.



XB Sub-Compact  
Finish Mower

Limited Cat. I, 3-pt. flex hitch, 48" cutting width,  
shear pin PTO shaft, Horsepower Range: Up to 25.

(Model: RFM-48-XB)

performance



# Finish Mower Specifications

<b>Model</b>	<b>RFM-48-XB</b>	<b>RFM-48</b>	<b>RFM-60</b>	<b>RFM-72</b>
<b>Approx. Weight</b>	424 lbs.	424 lbs.	554 lbs.	590 lbs.
<b>Performance</b>				
Cutting Width	48"	48"	60"	72"
Cutting Height	1" - 4 1/2"	1" - 4 1/2"	1" - 4 1/2"	1" - 4 1/2"
Blade Tip Speed	14,373 FPM	14,373 FPM	16,075 FPM	16,535 FPM
<b>Construction</b>				
Hitch	Limited Cat. I - Flex Hitch	Cat. I - Flex Hitch	Cat. I - Flex Hitch	Cat. I - Flex Hitch
Quick Hitch Compatible	No	Yes	Yes	Yes
Deck Thickness	3/16"	3/16"	3/16"	3/16"
Side Skirt Thickness	1/4"	1/4"	1/4"	1/4"
Gearbox HP Rating	Up to 25 HP	40 HP	40 HP	40 HP
No. of Blades	3	3	3	3
Blade Size	1/4" x 2" x 16"	1/4" x 2" x 16"	1/4" x 2" x 20"	1/4" x 2" x 24"
Blade Spindles	Greasable taper bearing	Greasable taper bearing	Greasable taper bearing	Greasable taper bearing
Drive Belt	Single V Belt	Single V Belt	Single V Belt	Single V Belt
Wheel Arm Pivot Shaft	1"	1"	1"	1"
Drive Belt Tension	Manual	Manual	Manual	Manual
Guage Wheels	(4) 8" X 3" Solid Tires	(4) 9" X 3.5" Solid Tires	(4) 9" X 3.5" Solid Tires	(4) 9" X 3.5" Solid Tires
Height Adjustment	Spacers - 1/2" increment	Spacers - 1/2" increment	Spacers - 1/2" increment	Spacers - 1/2" increment
Anti Scalp Roller	Standard	Standard	Standard	Standard

<b>Model</b>	<b>RSFM-72</b>	<b>RSFM-SS-84-FH</b>
<b>Approx. Weight</b>	605 lbs.	645 lbs.
<b>Performance</b>		
Cutting Width	72"	84"
Cutting Height	1" - 4 1/2"	1" - 4 1/2"
Blade Tip Speed	16,535 FPM	16,421 FPM
<b>Construction</b>		
Hitch	Cat. I - Flex Hitch	Cat. I - Flex Hitch
Quick Hitch Compatible	Yes	Yes
Deck Thickness	3/16"	3/16" Stainless Steel
Side Skirt Thickness	1/4"	1/4"
Gearbox HP Rating	40 HP	40 HP
No. of Blades	3	3
Blade Size	1/4" x 2" x 24"	1/4" x 2" x 28"
Blade Spindles	Greasable taper bearing	Greasable taper bearing
Drive Belt	Double V Belt	Double V Belt
Wheel Arm Pivot Shaft	1"	1"
Drive Belt Tension	Manual	Manual
Guage Wheels	(4) 9" X 3.5" Solid Tires	(4) 9" X 3.5" Solid Tires
Height Adjustment	Spacers - 1/2" increment	Spacers - 1/2" increment
Anti Scalp Roller	Standard	Standard



**Built Tough**

\*Specifications also available at [www.kingkutter.com](http://www.kingkutter.com).

\*Weights are for products only. Does not include packaging material.

**King Kutter Inc.**

PO Box 1200

Winfield, AL 35594

205.487.3202

[www.kingkutter.com](http://www.kingkutter.com)

**Quality Rotary Mowers & Farm Equipment**

King Kutter, Inc. reserves the right to change model numbers, optional equipment and product specifications without notice.

**KingKutter®**  
INCORPORATED

Printed in U. S. A 8/10