







Model shown: L-72-40-P

## *Quality* Rotary Cutters

Quality is an important word at King Kutter. It's who we are. It's what we do. It's the equipment we build. Landscapers, Nursery Owners, Farmers, and Homeowners can get the job done fast, and do a job they can be proud of with a Rotary Cutter from King Kutter.

King Kutter Rotary Cutters are designed, built, and manufactured to last. Tough decks, sturdy "I" beam side rails, rugged durable gearboxes, and laminated tailwheels will provide dependable service for many years to come. We have the right Cutter for your needs, starting with the original "I" beam models, Heavy Duty Cutters, XB Sub-Compact Cutters, and our newest patented Flex Hitch, Domed Deck units. The Flex Hitch Cutter is also available as a stainless steel model, a King Kutter exclusive. Maintain your property, promote healthier pasture growth, or mow property easements with a King Kutter Rotary Cutter.



Pull Type Rotary Cutter



Optional Stainless Steel Deck



Adjustable Tailwheel







Model shown: L-72-40-P

King Kutter's Rotary Cutters are quality constructed, durable Cutters that are built to last. They are made with rugged "I" beam side rails, and a single sheet top deck that is fully reinforced with cross and spider bracing. A rugged gearbox and stump jumper, adjustable laminated tail wheel, and shielded PTO shaft will provide years of service. These Cutters are available as lift type or pull type.

**Choose from four sizes:**

40" Rotary Cutter - 40 HP gearbox, shear pin protection. (Lift Type Model: L-40-40-P)

48" Rotary Cutter - 40 HP gearbox, shear pin protection.  
(Lift Type Model: L-48-40-P) (Pull Type Model: P-48-40-P)

60" Rotary Cutter - 40 or 60 HP gearbox, shear pin or slip clutch protection.  
(Lift Type Models: L-60-40-P & L-60-40-SC) (Pull Type Model: P-60-40-P)

72" Rotary Cutter - 40 or 60 HP gearbox, shear pin or slip clutch protection, 8" or 6" side rails.  
(Lift Type Models: L-72-40-P, L-72-40-P6, L-72-60-P, L-72-40-SC, L-72-60-SC, L-72-40-SC-P6, L-72-60-P6, & L-72-60-SC-P6)  
(Pull Type Models: P-72-40-P, P-72-60-P, & P-72-60-SC)



- Rugged "I" Beam Side Rails
- Heavy Gauge, One Piece Top Sheet
- Adjustable Laminated Tail Wheel
- Heavy Duty, Cast Iron Gearbox
- Cross & Spider Bracing
- Shielded PTO Shaft
- Stump Jumper
- Heavy, Forged, Heat Treated Blades



Pull Type model shown: P-60-40-P







Model shown: L-72-40-P6-FH

King Kutter's Flex Hitch Rotary Cutter demonstrates the latest in Rotary Cutter innovation, and it's only available from King Kutter Inc. The Cat. I quick hitchable, flex hitch design, is unlike anything on the market today. The unique hitch allows it to roll 15° up or down, on the left or right side of the machine. This feature allows the Flex Hitch Rotary Cutter to follow the contours of your field like no Rotary Cutter before. The domed deck design sheds water and debris to prevent material from collecting on the deck. Whether mowing pastures, roadsides, parks, or easements, the King Kutter Flex Hitch Rotary Cutter is perfect for you.

## Choose from three sizes:

48" Flex Hitch Rotary Cutter - 40 HP gearbox, shear pin protection.  
(Model: L-48-40-P-FH)

60" Flex Hitch Rotary Cutter - 40 HP gearbox, shear pin  
or slip clutch protection. (Models: L-60-40-P-FH, L-60-40-SC-FH)

60" Stainless Steel Flex Hitch Rotary Cutter - 40 HP gearbox,  
slip clutch protection. (Model: L-60-40-SS-FH)

72" Flex Hitch Rotary Cutter - 40 HP gearbox, shear pin  
or slip clutch protection. (Models: L-72-40-P6-FH, L-72-40-SC-P6-FH)



Patented Flex Hitch Design



Optional Slip Clutch

Domed Deck



# Kutting Made Easy.



Quick Hitch  
Compatible



## King Kutter Flex Hitch Rotary Cutters.

- |   |   |   |  |
|---|---|---|--|
| 1 | Cat. I Quick Hitch Compatible Flex Hitch System | 5 | Shielded PTO Shaft with Shear Pin (Slip Clutch Optional) |
| 2 | Domed Deck                                      | 6 | Optional Chain Guards                                    |
| 3 | Heavy Duty Cast Iron Gearbox                    | 7 | Laminated Tailwheel                                      |
| 4 | Adjustable Tailwheel Assembly                   | 8 | "I" Beam Side Rails                                      |







Model shown: L-84-80-HD

King Kutter's Heavy Duty Rotary Cutters are designed to meet the demands of today's Farmer. This Cutter is built to perform. Durable, heavy-gauge 8" "I" beam side rails, and a fully reinforced 3/16" thick top-deck will stand up to tough conditions. HD gearboxes and slip clutches and dual laminated tail wheels (6ft & 7ft models) are features that are standard on a King Kutter Heavy Duty Rotary Cutter. These Cutters are available as lift type or pull type.

### ***Choose from three sizes:***

60" HD Rotary Cutter - 60 HP gearbox, slip clutch protection,  
Single tailwheel design only. (Lift Type Model: L-60-60-HD)

72" HD Rotary Cutter - 60 or 80 HP gearbox, slip clutch protection.  
(Lift Type Models: L-72-60-HD & L-72-80-HD)

84" HD Rotary Cutter - 60 or 80 HP gearbox, slip clutch protection.  
(Lift Type Models: L-84-60-HD & L-84-80-HD)  
(Pull Type Models: P-84-60-HD & P-84-80-HD)



Reinforced Deck



Dual Tailwheel on 6 ft & 7 ft




Easy Tailwheel Adjustment





King Kutter's XB Sub-Compact Rotary Cutter is a quality constructed, durable Cutter that is built to last. It is constructed with rugged steel side rails and has a one piece top deck that is fully reinforced. Standard features include a cast iron gearbox, stump jumper, twin tail wheels and a shielded PTO shaft with a shear pin.

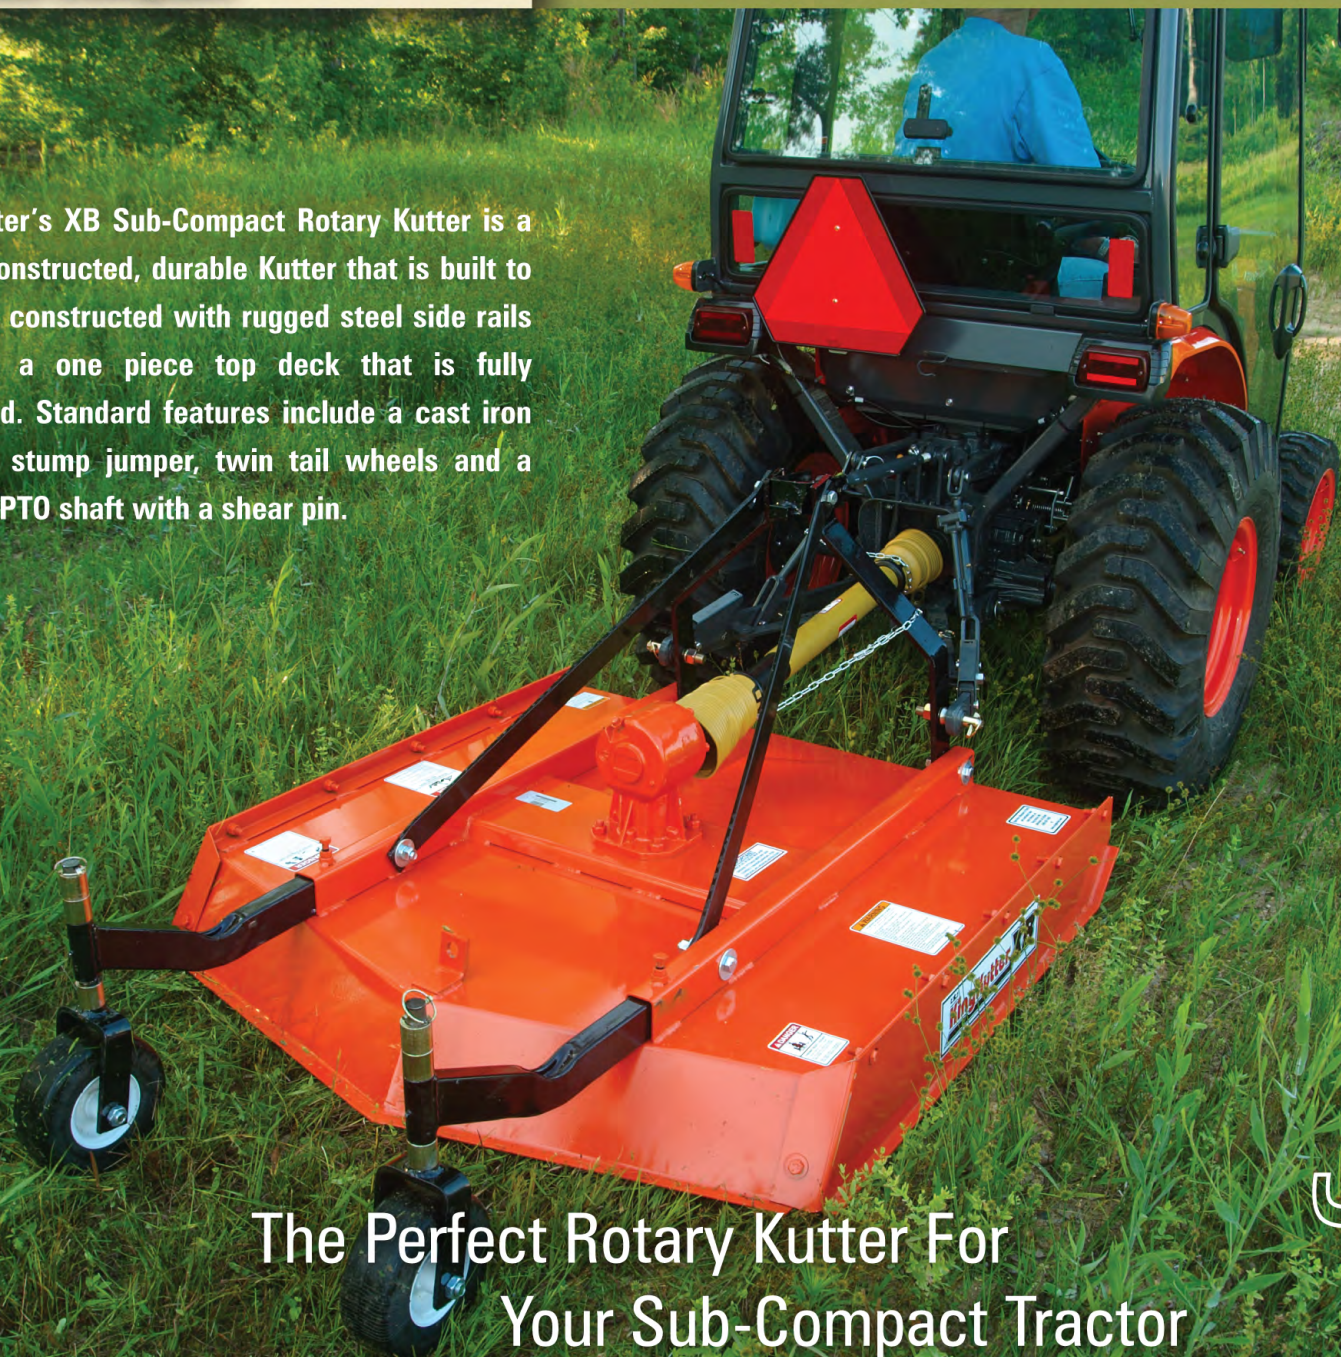

The Perfect Rotary Cutter For  
Your Sub-Compact Tractor

performanoe



XB Sub-Compact  
Rotary Cutter

Limited Cat. I, 3-pt hitch, dual tail wheels,  
shear pin PTO shaft. Horsepower range: Up to 25  
(Model: L-48-40-XB)



# Rotary Cutter Specifications

<b>Model</b>	L-40-40-P	L-48-40-P	L-60-40-P / L-60-40-SC	L-72-40-P / L-72-40-P6	L-72-40-SC / L-72-40-SC-P6	L-72-60-P / L-72-60-P6	L-72-60-SC / L-72-60-SC-P6
PTO Speed Req'd	540	540	540	540	540	540	540
Approx. Weight	350 lbs	428 lbs	515 lbs. / 531 lbs	685 lbs. / 659 lbs.	709 lbs. / 695 lbs.	729 lbs. / 704 lbs.	741 lbs. / 714 lbs.
<b>Performance</b>							
Cutting Width	40"	48"	60"	72"	72"	72"	72"
Cutting Capacity	Up to 1"	Up to 1"	Up to 1"	Up to 1"	Up to 1"	Up to 1"	Up to 1"
Blade Tip Speed	10,636 FPM	12,136 FPM	11,943 FPM	14,228 FPM	14,228 FPM	14,131 FPM	14,131 FPM
Gearbox Protection	Shear Pin	Shear Pin	SP / SC	Shear Pin	Slip Clutch	Shear Pin	Slip Clutch
<b>Construction</b>							
Spindle Gearbox HP	40 HP	40 HP	40 HP	40 HP	40 HP	60 HP	60 HP
Hitch	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I
Quick Hitch compatible	No	No	No	No	No	No	No
Input Drive Line	ASAE Cat 4	ASAE Cat 4	ASAE Cat 4	ASAE Cat 5	ASAE Cat 5	ASAE Cat 5	ASAE Cat 5
Blade Size	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
Deck Mat. Thickness	12 Guage	12 Guage	12 Guage	10 Guage	10 Guage	10 Guage	10 Guage
Side Skirt Material	"I" Beam	"I" Beam	"I" Beam	"I" Beam	"I" Beam	"I" Beam	"I" Beam
Skirt Depth	6"	6"	6"	8" / 6"	8" / 6"	8" / 6"	8" / 6"
Wheels	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.
Additional Guards	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Stump Jumper	Blade Bar only	Yes	Yes	Yes	Yes	Yes	Yes

<b>Model</b>	L-60-60-HD	L-72-60-HD / L-72-80-HD	L-84-60-HD / L-84-80-HD	L-48-40-XB	P-48-40-P	P-60-40-P	P-72-40-P / P-72-60-P
PTO Speed Req'd	540	540	540	540	540	540	540
Approx. Weight	800 lbs.	1217 lbs. / 1236 lbs.	1516 lbs. / 1529 lbs.	422 lbs.	485 lbs.	575 lbs.	725 lbs. / 771 lbs.
<b>Performance</b>							
Cutting Width	60"	72"	84"	48"	48"	60"	72"
Cutting Capacity	Up to 1"	Up to 2"	Up to 2"	Up to 1"	Up to 1"	Up to 1"	Up to 1"
Blade Tip Speed	11,862 FPM	14,131 FPM	16,401 FPM	12,136 FPM	12,136 FPM	11,943 FPM	14,228 FPM / 14,131 FPM
Gearbox Protection	Slip Clutch	Slip Clutch	Slip Clutch	Shear Pin	Shear Pin	Shear Pin	Shear Pin
<b>Construction</b>							
Spindle Gearbox HP	60 HP	60 HP / 80 HP	60 HP / 80 HP	40 HP	40 HP	40 HP	40 HP / 60 HP
Hitch	Cat. I or II	Cat. I or II	Cat. II	Limited Cat. I	Pull tongue	Pull tongue	Pull tongue
Quick Hitch compatible	No	No	No	No	No	No	No
Input Drive Line	ASAE Cat 5	ASAE Cat 5	ASAE Cat 5	ASAE Cat 4	ASAE Cat 4	ASAE Cat 5	ASAE Cat 5
Blade Size	1/2" x 4"	1/2" x 4"	1/2" x 4"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
Deck Mat. Thickness	3/16"	3/16"	3/16"	12 Guage	12 Guage	12 Guage	10 Guage
Side Skirt Material	"I" Beam	"I" Beam	"I" Beam	10 Guage	"I" Beam	"I" Beam	"I" Beam
Skirt Depth	8"	8"	8"	6"	6"	6"	8"
Wheels	Sgl. Lam.	Dual Lam.	Dual Lam.	Dual Molded	Dual Lam.	Dual Lam.	Dual Lam.
Additional Guards	Opt.	Opt.	Opt.	Std.	Opt.	Opt.	Opt.
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes	Yes

<b>Model</b>	P-72-60-SC	P-84-60-HD / P-84-80-HD	L-48-40-P-FH	L-60-40-P-FH / L-60-40-SC-FH	L-60-40-SS-FH	L-72-40-P6-FH / L-72-40-SC-P6-FH
PTO Speed Req'd	540	540	540	540	540	540
Approx. Weight	785 lbs.	1450 lbs. / 1480 lbs.	470 lbs.	557 lbs. / 584 lbs.	565 lbs.	664 lbs. / 691 lbs.
<b>Performance</b>						
Cutting Width	72"	84"	48"	60"	60"	72"
Cutting Capacity	Up to 1"	Up to 2"	Up to 1"	Up to 1"	Up to 1"	Up to 1"
Blade Tip Speed	14,131 FPM	16,401 FPM	12,136 FPM	11,943 FPM	11,943 FPM	14,228 FPM
Gearbox Protection	Slip Clutch	Slip Clutch	Shear Pin	SP / SC	Slip Clutch	SP / SC
<b>Construction</b>						
Spindle Gearbox HP	60 HP	60 HP / 80 HP	40 HP	40 HP	40 HP	40 HP
Hitch	Pull tongue	Pull tongue	Cat. I	Cat. I	Cat. I	Cat. I
Quick Hitch compatible	No	No	Yes	Yes	Yes	Yes
Input Drive Line	ASAE Cat 5	ASAE Cat 5	ASAE Cat 4	ASAE Cat 4	ASAE Cat 4	ASAE Cat 4
Blade Size	1/2" x 3"	1/2" x 4"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
Deck Mat. Thickness	10 Guage	3/16"	12 Guage	12 Guage	12 Guage Stainless Steel	12 Guage
Side Skirt Material	"I" Beam	"I" Beam	"I" Beam	"I" Beam	10 Guage Stainless Steel	"I" Beam
Skirt Depth	8"	8"	6"	6"	6"	6"
Wheels	Dual Lam.	Dual Lam.	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.	Sgl. Lam.
Additional Guards	Opt.	Opt.	Opt.	Opt.	Standard	Opt.
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes

\*Specifications also available at [www.kingkutter.com](http://www.kingkutter.com).

\*Weights are for products only. Does not include packaging material.

\*SP = Shear Pin    \*SC = Slip Clutch  
\*Sgl. Lam. = Single Laminated    \*Dual Lam. = Dual Laminated

**King Kutter Inc.**

PO Box 1200

Winfield, AL 35594

**205.487.3202**

[www.kingkutter.com](http://www.kingkutter.com)



**Quality Rotary Mowers & Farm Equipment**

King Kutter, Inc. reserves the right to change model numbers, optional equipment and product specifications without notice.