



Quality





Quality Gear Drive Rotary Tillers

Quality is an important word at King Kutter. It's who we are. It's what we do. It's the equipment we build. Landscapers, Nursery Owners, Farmers, and Homeowners can get the job done fast, and do a job they can be proud of, with a Gear Drive Rotary Tiller from King Kutter.

Every King Kutter Tiller is built to perform year after year. There's a certain satisfaction that comes from doing the job right. Whether you have tough sod, or hard compacted ground, King Kutter Gear Drive Rotary Tillers will get the job done. Producing an ideal soil mix is what King Kutter Tillers are all about. With six tines per flange, you can till down to eight inches. There are five models designed for your ground and your tractor. The 4' TG-48-XB is ideal for sub-compact tractors. The 4' TG-48 is ideal for 20 to 35 horse power tractors. The 5' TG-60 model is designed for the most popular compact tractors in the 25 to 40 horse power range. Choose the 6' TG-72 model for tractors with 35 to 50 horse power. The 7' TG-84 is perfect for larger operations and ideal for use on tractors from 50 to 65 horse power. The choice is yours, five quality Gear Drive Rotary Tillers that are built tough and will give you years of dependable performance.



Slip Clutch Drive Line Standard



Ideal Seed Bed

yal Treatment

Every King Kutter Tiller is built to perform year after year. Every King Kutter Tiller is built to the highest standards.

Gear Drive Rotary Tillers

Choose from five models:

4' TG-48 has 36 L-Tines with 6 on each flange. Horsepower range: 20-35

5' TG-60 has 42 L-Tines with 6 on each flange. Horsepower range: 25-40

6' TG-72 has 54 L-Tines with 6 on each flange. Horsepower range: 35-50

7' TG-84 has 66 L-Tines with 6 on each flange. Horsepower range: 50-65

4' TG-48-XB (designed for Sub-Compact Tractors) has 36 L-Tines with 6 on each flange.
Horsepower range: Up to 25



Heavy Duty Frame



Adjustable Tailgate




TG-84

Why Gear Drive?

Dependable performance and low maintenance.

Only available with a King Kutter Gear Drive Rotary Tiller.

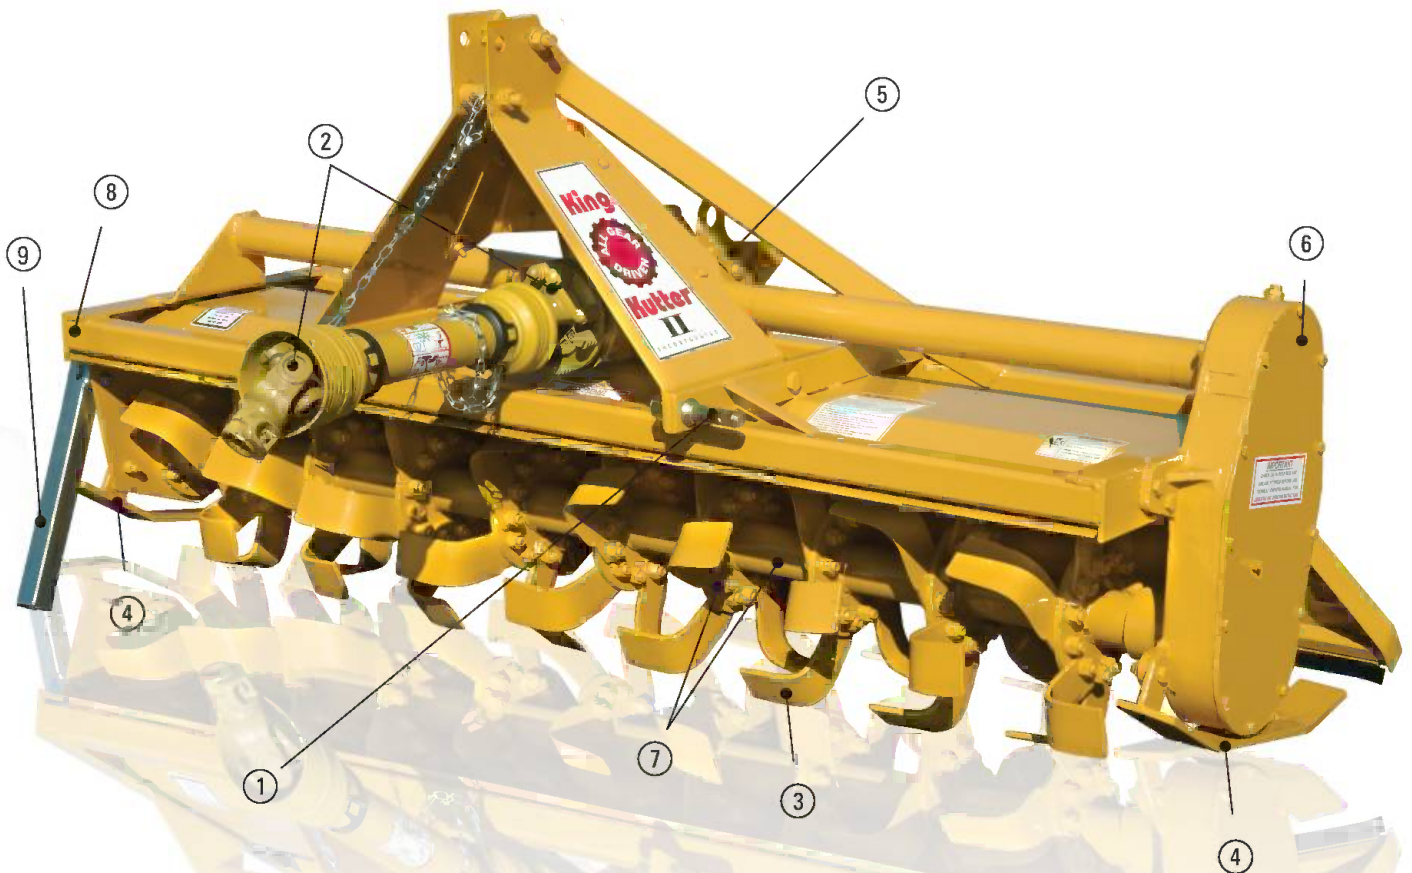

Gear Drive. More Tines. Better Tilling.

- | | | | |
|---|---------------------------|---|-----------------------------------|
| 1 | Cat. I Hitch | 5 | Cast Iron Center Gearbox |
| | Cat. I + II Hitch on TG84 | 6 | Cast Iron Gear Drive Side Gearbox |
| 2 | Slip Clutch Drive Line | 7 | Heavy Duty Rotor Bar and Flanges |
| 3 | Six Tines Per Flange | 8 | Heavy Duty Square Tube Frame |
| 4 | Adjustable Skid Shoes | 9 | Standard Kick Stand |



The Perfect Tiller For Your Sub-Compact Tractor

Get more work out of your sub-compact tractor with the King Kutter XB Sub-Compact Gear Drive Rotary Tiller. The TG-48-XB, for sub-compacts up to 25 horse power, has all the quality features of the full size tillers. The heavy duty frame and 6 tines per flange produce a better seed bed. A slip clutch PTO shaft transfers power smoothly to the gear driven center and side gearboxes.




XB Sub-Compact
Gear Drive Rotary Tiller

4' TG-48-XB has 36 L-Tines with 6 on each flange. Horsepower range: Up to 25

Performance

Gear Drive Rotary Tiller Specifications

Model:	TG-48	TG-60	TG-72	TG-84
PTO Speed Required	540	540	540	540
Tractor HP Range	20 - 35 HP	25 - 40 HP	35 - 50 HP	50 - 65 HP
Approx. Weight	569 lbs	630 lbs	721 lbs	805 lbs
Performance:				
Working Width	48"	60"	72"	84"
Max. Tilling Depth	8"	8"	8"	8"
Rotor Shaft Speed (RPM)	210@540	210@540	210@540	210@540
Gearbox Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Construction:				
Rotor Drive Type	Gear	Gear	Gear	Gear
No. of Flanges	6	7	9	11
No. of Tines per Flange	6	6	6	6
Hitch	Cat I	Cat I	Cat I	Cat I or Cat II
Input Drive Line Category	ASAE Cat. 4	ASAE Cat. 4	ASAE Cat. 4	ASAE Cat. 4
Tine Type	L shaped	L shaped	L shaped	L shaped
Tine Spacing	7.875"	7.875"	7.5"	7.5"

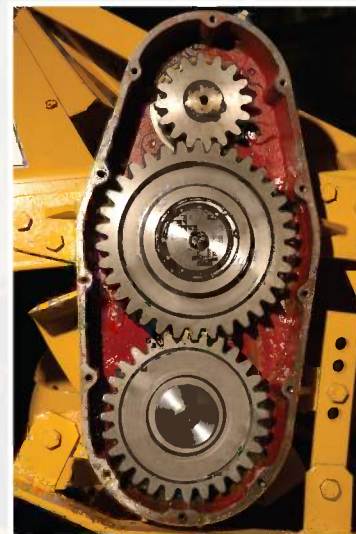

All Gear Drive

Model:	TG-48-XB
PTO Speed Req'd	540
Tractor HP Range	Up to 25 HP
Approx. Weight	489 lbs
Performance:	
Working Width	48"
Max. Tilling Depth	6.5"
Rotor Shaft Speed (RPM)	250 @ 540
Gearbox Protection	Slip Clutch
Construction:	
Rotor Drive Type	Gear
No. of Flanges	6
No. of Tines per Flange	6
Hitch	Limited Cat I
Input Drive Line Category	ASAE Cat. 4
Tine Type	L shaped
Tine Spacing	7.5"



Built Tough to the Highest Standards

*Weights are for products only. Does not include packaging material.

*Specifications also available at www.kingkutter.com.

King Kutter Inc.

PO Box 1200

Winfield, AL 35594

205.487.3202

www.kingkutter.com

Quality Rotary Mowers & Farm Equipment

King Kutter, Inc. reserves the right to change model numbers and specifications without notice.

KingKutter II
INCORPORATED