

Product Guide



Quality Rotary Mowers & Farm Equipment

King Kutter Inc. has been manufacturing quality mowers and farm equipment since the 1960's in northwest Alabama. Through the years the product line has expanded and evolved to encompass many products, to the point where King Kutter Inc. is considered an industry leader in farm equipment, specializing in rotary Kutters, gear driven rotary tillers, and landscape equipment.

Page#	Products	
3	Flex Hitch Rotary Kutters	
4	Rotary Kutters	١,
5	Pull Type and Heavy Duty Rotary Kutters	ľ
6	Lawn Pluggers & Lift Kulti-Packer	I.
7	Dual Edge Land Graders, Lawn Aerators & Dirt Scoop	ľ
8	Box Blades	١,
9	Landscape Rakes	II.
10 - 12	Rear Blades	
13	Finish Mowers	ľ
14	"C"Tine Cultivator & Field Cultivator	١,
15	Plows, Middle Buster, & Sub-Soiler	ľ
16 - 17	Disc Harrows	ı
18 - 19	Gear Drive Rotary Tillers	
20	Carry All & Trailer Movers	
21	Pallet Mover & Wire Unroller	
22 - 23	Hay Moving Equipment	
24 - 27	XB Sub-Compact Equipment	ı
28 - 29	Seeder / Spreaders	ı
30 - 31	ATV Equipment	ľ
32 - 33	Arena Renovator, Drag & Rotary Harrows	ı
34 - 35	King Kutter Parts & Product Brochures	

King Kutter Inc.

PO Box 1200

Winfield, AL 35594

205.487.3202

www.kingkutter.com

King Kutter has many Cat. I Quick Hitch Compatible products. Just look for this icon to find one of the many Quick Hitch Compatible products available from King Kutter.








King Kutter's Flex Hitch Rotary Kutter demonstrates the latest in Rotary Kutter innovation, and it's only available from King Kutter Inc. The Cat. I quick hitchable, flex hitch design, is unlike anything on the market today. The unique hitch allows it to roll 15° up or down, on the left or right side of the machine. This feature allows the Flex Hitch Rotary Kutter to follow the contours of your field like no Rotary Kutter before. The domed deck design sheds water and debris to prevent material from collecting on the deck. Whether mowing pastures, roadsides, parks, or easements, the King Kutter Flex Hitch Rotary Kutter is perfect for you.

- Cat. I quick hitch compitable flex hitch
- "I" Beam side rails (except stainless)
- · Laminated tail wheel
- 40 HP cast iron gearbox
- . Shear pin PTO shaft protection
- · Slip clutch optional
- 12 Gauge domed deck design
- Stainless steel deck model available
- 1/2" x 3" Free swinging blades
- · Stump jumper

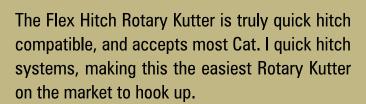







Model	Working Width	Gearbox HP	Approx. Weight
L-48-40-P-FH	48"	40 HP	470 lbs.
L-60-40-P-FH	60"	40 HP	557 lbs.
L-60-40-SC-FH	60"	40 HP	581 lbs.
L-60-40-SS-FH	60"	40 HP	565 lbs.
L-72-40-P6-FH	72"	40 HP	664 lbs.
L-72-40-SC-P6-	-FH 72"	40 HP	691 lbs.

King Kutter's Rotary Kutters are quality constructed, durable Kutters that are built to last. They are made with rugged "I" beam side rails, and a single sheet top deck that is fully reinforced with cross and spider bracing. A rugged gearbox and stump jumper, adjustable laminated tail wheel, and shielded PTO shaft will provide years of service. These Kutters are available as lift type or pull type





- Cat 1, 3-pt hitch
- "I" Beam side rails
- · Laminated tail wheel
- 40 or 60 HP cast iron gearboxes
- Shear pin PTO protection
- Slip clutch optional
- 12 Gauge deck (48", & 60" models)
- 10 Gauge deck (72" models)
- One piece top deck
- 1/2" x 3" Free swinging blades
- Stump jumper

Model	Working Width	Gearbox HP	Approx. Weight
L-48-40-P	48"	40 HP	428 lbs.
L-60-40-P	60"	40 HP	515 lbs.
L-60-40-SC	40"	40 HP	531 lbs.
L-72-40-P	72"	40 HP	685 lbs.
L-72-40-P6	72"	40 HP	659 lbs.
L-72-40-SC	72"	40 HP	709 lbs.
L-72-40-SC-P6	5 72"	40 HP	695 lbs.
L-72-60-P	72"	60 HP	729 lbs.
L-72-60-P6	72"	60 HP	704 lbs.
L-72-60-SC	72″	60 HP	741 lbs.
L-72-60-SC-P6	5 72"	60 HP	714 lbs.



King Kutter's Heavy Duty Rotary Kutters are designed to meet the demands of today's farmer. This Kutter is built to perform. Durable, heavy-gauge 8" " I " beam side rails, and a fully reinforced 3/16" thick top-deck will stand up to tough conditions. HD gearboxes, slip clutches, and dual laminated tail wheels (6 ft & 7 ft models) are features that are standard on King Kutter Heavy Duty Kutters. The 7 ft HD Rotary Kutters are available as lift type.





Model	Working Width	Gearbox HP	Approx. Weight
L-60-60-HD	60"	60 HP	800 lbs.
L-72-60-HD	72"	60 HP	1217 lbs.
L-72-80-HD	72"	80 HP	1236 lbs.
L-84-60-HD	84"	60 HP	1516 lbs.
L-84-80-HD	84"	80 HP	1529 lbs.

- 60 & 80 HP gearboxes
- 3/16" Thick top deck
- · Slip clutch PTO shaft protection
- "I" Beam side rails
- Dual laminated tail wheels (6 & 7 ft models)
- Stump jumper
- Easy tail wheel adjustment

Heavy Duty Rotary Kutter

Model	Working Width	Gearbox HP	Approx. Weight
P-60-40-P	60"	40 HP	575 lbs.
P-72-40-P	72″	40 HP	725 lbs.
P-72-60-P	72″	60 HP	771 I bs.
P-72-60-SC	72″	60 HP	785 lbs.

- "I" Beam side rails
- One piece top sheet
- Stump jumper



- · Heavy duty, cast iron gearbox
- · Easy height adjustment
- Pull tongue design

Pull Type Rotary Kutters

6

Model	Working Width	Approx. Weight
LP-48	48"	322 lbs.
LP-60	60"	353 lbs.
LP-72	72"	383 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 15/16" Beveled spoons
- Individually attached spoons

Lawn Pluggers

- · Greasable bearings
- Parking stands
- · Built in weight box





Landscape your property, build and maintain roads, aerate your lawn, move piles of dirt, or prepare to lay sod with King Kutter Landscaping Equipment. King Kutter Box Blades, Landscape Rakes, Dirt Scoops, Lawn Pluggers, Lawn Aerators, Dual Edge Land Graders, and Kulti-packers are designed, built, and manufactured to last. We have four styles of Box Blades including the standard BB Series, the Professional and Hinged Back models, and the XB Sub-Compact units. King Kutter also has four styles of Landscape Rakes. The standard YR series, the Tubular Framed models, which feature our patented kickstand, a Professional series, and the XB models designed specifically for Sub-Compact tractors. Lawn Pluggers and Lawn Aerators are available in three sizes, as are the Dual Edge Land Graders. King Kutter's 3-pt. mounted Kulti-packer is available in a 72" working width. Dirt Scoops round out the line, and we feature two series of them; The Standard DS model and the XB Sub-Compact model. Building a flower bed, aerating your lawn, or fixing the potholes in your driveway, King Kutter has the tool for you.

Model Working Width Approx. Weight KP-72 72" 508 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 31 Cast iron packer wheels
- Greasable bearings

- · Parking stands
- · Built in weight box





Kulti-Packer

Model	Working Width	Approx. Weight
DEG-60	60"	447 lbs.
DEG-72	72"	491 lbs.
DEG-84	84"	540 lbs.

- Cat. I quick hitch compatible 3-pt. hitch 1/2" thick replaceable wear pads
- Two reversible cutting edges
- Flat steel, angle, and tube frame

Quick Hitch Compatible



Dual Edge Land Grader



Model	Working Width	Approx. Weight
LA-48	48"	181 lbs.
LA-60	60"	219 lbs.
Ι Δ-72	72"	258 lhs

- Cat. I quick hitch compatible 3-pt. hitch
- 2" long, 3/8" diameter steel spikes
- Spikes welded in spiral configuration
- Greasable bearings
- Parking stands
- Built in weight box



Lawn Aerators

Model	Working Width	Approx. Weight
DS-30	30"	269 lbs.

- · Cat. I 3-pt. hitch
- HD Angle frame construction
- Forward or reverse attachment
- Trip lever dump







Model	Working Width	Approx. Weight
BB-48	48"	372 lbs.
BB-60	60"	441 lbs.
BB-66	66"	471 lbs.
BB-72	72″	500 lbs.
BB-84	84"	550 lbs.
BB-96	96"	604 lbs.

- · Cat. I quick hitch compatible 3-pt. hitch
- 1/2" x 3" Hitch frame with 3/8" x 2" brace arms
- 1/4" Rounded end plates
- 4" x 4" Square box shank housing
- · Four position adjustable scarifiers
- Two 1/2" x 6" reversible cutting edges

QuickHitch

Replaceable scarifier points



Box Blades



Model	Working Width	Approx. Weigh
BB-G-48	48"	384 lbs.
BB-G-54	54"	418 lbs.
BB-G-60	60"	447 lbs.
BB-G-66	66"	479 lbs.
BB-G-72	72"	510 lbs.
BB-G-84	84"	573 lbs.
BB-G-96	96"	670 lbs.



- · Cat. I quick hitch compatible 3-pt. hitch
- All welded 3/8" plate hitch frame
- 1/4" Rounded end plates
- 4" x 4" Square box shank housing
- Four position adjustable scarifiers
- Two 1/2" x 6" reversible cutting edges
- Replaceable scarifier points

Professional Box Blades

Model	Working Width	Approx. Weight
H-BB-60	60"	502 lbs.
H-BB-72	72"	565 lbs.
H-BB-84	84"	622 lbs.
H-BB-96	96"	685 lbs.

- Cat. I quick hitch compatible 3-pt. hitch Four position adjustable scarifiers
- All welded 3/8" plate hitch frame
- 1/4" Rounded end plates
- 4" x 4" Square box shank housing
- Two 1/2" x 6" reversible cutting edges
- Replaceable scarifier points





Hinged Back Box Blades



Model	Working Width	Approx. Weight
YR-60	60"	229 lbs.
YR-72	72″	248 lbs.
YR-84	84"	263 lbs.
YR-96	96″	288 lbs.

- Five forward & reverse angle settings
- 5/16" x 1" Heat treated spring steel tines
- Tines individually attached 1" spacing
- Reinforced steel construction frame
- Cat. I, 3-pt. hitch
- 3" x 3" Angle beam tine frame
- Optional gauge wheels

Landscape Rakes

Model	Working Width	Approx. Weight
YR-G-60	60"	223 lbs.
YR-G-72	72"	239 lbs.
YR-G-84	84"	265 lbs.
YR-G-96	96"	290 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- Five forward & reverse angle settings
- 5/16" x 1" Heat treated spring steel tines
- Tines individually attached 1" spacing

Professional Landscape Rakes

- · Industrial tube frame
- 3" x 3" Angle beam tine frame
- · Optional gauge wheels
- Adjustable tine stabilizer bar







Model	Working Width	Approx. Weight
TYR-60	60"	218 lbs.
TYR-72	72"	250 lbs.
TYR-84	84"	271 lbs.

- Five forward & reverse angle settings
- 5/16" x 1" Heat treated spring steel tines
- Industrial tube frame

• Cat. I, 3-pt. hitch

- 3" x 3" Angle beam tine frame
- Optional gauge wheels
- Patented kick stand



Tubular Frame Landscape Rakes

Maintaining your driveway, moving snow, or any number of dirt working applications are a breeze with a King Kutter Rear Blade. We have the right blade for your needs: the angle iron frame RB & RB-OT Series, the quick hitch compatible industrial tube frame TRB, RB-G, PRB, and RB-QAT or our heavy duty gusseted reinforced HD-RB Series. King Kutter Rear Blades are built with the quality and features that will make those hard jobs go quickly. Need to build a road? King Kutter's RB-QAT 84" Rear Blade provides the strength and versatility to help you build a road to the back acreage of your property. No matter which King Kutter Rear Blades you choose, rest assured that it will have Quality and Features you need.

Model	Working Width	Approx. Weight
RB-60	60"	233 lbs.
RB-72	72"	256 lbs.
RB-84	84"	277 lbs.

- Five forward & reverse angle settings
- Reinforced steel construction frame
- 1/4" Thick specially formed moldboard
- 14" tall moldboard
- Reversible cutting edge (1/2" x 6")
- Cat. I 3-pt. hitch

RB Rear Blades



Model	Working Width	Approx. Weight
RB-0T-60	60"	267 lbs.
RB-0T-72	72"	292 lbs.
RB-0T-84	84"	305 lbs.

- Five forward & reverse angle settings
- 1/4" Thick specially formed moldboard
- Reversible cutting edge (1/2" x 6")
- Reinforced steel construction frame
- 14" tall moldboard
- Cat. I 3-pt. hitch
- Offset & tilt adjustments

RB-OT Rear Blades



Model	Working Width
RB-72-QAT	72″
RB-84-QAT	84"

- · Cat. I quick hitch compatible 3-pt hitch
- Five forward & reverse angle settings
- 14" Tall moldboard
- Reversible cutting edge (1/2" x 6")
- · Reinforced tube frame with gussets
- · Patented kick stand



Approx. Weight

369 lbs. 389 lbs.

RB-QAT Rear Blade

Model	Working Width	Approx. Weight
RB-G-60	60"	221 lbs.
RB-G-72	72"	242 lbs.
RB-G-84	84"	260 lbs.


- Cat. I quick hitch compatible 3-pt. hitch
- 1/2" x 6" Reversible cutting edge
- Five forward & reverse angle settings

Professional RB-G Rear Blades

- · Industrial tube frame
- 14" Specially formed reinforced moldboard







- Cat. I quick hitch compatible 3-pt hitch
- Five forward & reverse angle settings
- 14" Tall moldboard

- Reversible cutting edge (1/2" x 6")
- Reinforced tube frame with gussets
- · Patented kick stand





Tubular Frame Rear Blades



Model	Working Width	Approx. Weight
PRB-72	72"	330 lbs.
PRB-84	84"	359 lbs.
PRB-96	96"	386 lbs.

- · Cat. I quick hitch compatible 3-pt. hitch
- 1/2" x 6" Reversible cutting edge
- Seven forward & five reverse angle settings Easy adjust angle and tilt
- · 14" Specially formed reinforced moldboard

PRB Rear Blades






King Kutter's PRB Professional Rear Blades are designed for dependable performance on the tough jobs. The offset and tilt features, in conjunction with the industrial tube frame, make this a great blade for road ditch and driveway maintenance. The special formed moldboard and reinforced back bracing provide extra strength and performance.

King Kutter's HD-RB Heavy Duty Rear Blades are engineered to be dependable on the really tough jobs. They are great for dirt work, road maintenance, ditching, cleaning livestock pens, and much more. This series features a specially formed moldboard with reinforced back bracing for added strength and performance.

Model	Working Width	Approx. Weight
HD-RB-72	72"	569 lbs.
HD-RB-84	84"	611 lbs.
HD-RB-96	96"	636 lbs.

· Cat. I, 3-pt. hitch

- 1/2" x 6" reversible cutting edge
- Five forward & reverse angle settings
- HD Tube & angle frame with gussets
- 14" specially formed reinforced moldboard































The grass will look better on your side of the fence when you cut it with a King Kutter Finish Mower. King Kutter Finish Mowers are built with the quality and features you expect from King Kutter. Mowing has never been easier because of the *free-floating flex hitch system* which will follow the contour of the ground.



Model	Working Width	Approx. Weight
RFM-48	48"	424 lbs.
RFM-60	60"	554 lbs.
RFM-72	72"	590 lbs.
RSFM-72*	72"	605 lbs.
RSFM-SS-84	-FH* 84"	645 lbs.

^{*} Double V-belt models







- HD Cast iron gearbox
- Easy height adjustment
- Baffled deck
- 7' Model available with stainless steel deck only
- Free floating flex hitch system



Plow your garden. Prepare the soil to plant. Make furrows to plant potatoes. Cultivate your sweet corn patch. Loosen compacted soil. Rennovate and dethatch pastures. King Kutter's Tillage Tools are the best the industry has to offer for landscapers, contractors, and farmers with large gardens or small acreages.



• Cat. I quick hitch compatible 3-pt. hitch

- · Adjustable row widths
- Reversible heat treated points
- · Spring steel "C" tines
- · Heavy duty angle frame



Model \\CV-G-1-C

Working Width 54"

Approx. Weight 122 lbs.



"C" Tine Cultivator

14

Model Working Width Approx. Weight FCV-72-D 72" 292 lbs.

- 13 High vibration Danish "S" tines
- Cat. I quick hitch compatible, straddle hitch
- · Reversible points
- Tubular frame



Field Cultivator



Model Working Width Approx. Weight MBP-1-14 14" 263 lbs. MBP-2-14 28" 498 lbs.

- · Cat. I, 3-pt. hitch
- Replaceable plow shares, land slides, & shins
- One or two bottom models
- 1" x 4" main frame and plow share beam
- Shear bolt breakaway mechanism Optional 14" coulters available.
- •14" Moldboards

Moldboard Plows

Model Working Width Approx. Weight MB 1 Furrower 90 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- Solid steel shank
- Forged lift pins
- · Heavy duty steel frame
- •14" heat treated furrower







Middle Buster

Model Working Width Approx. Weight SUB 101 lbs. 1 Ripper Shank



- Cat. I quick hitch compatible 3-pt. hitch
- · Solid steel shank
- · Forged lift pins
- · Heavy duty steel frame
- · Heat treated reversible ripper tooth



Sub-Soiler

15



Tough field conditions demand a tough King Kutter Disc Harrow. We have three styles to choose from, the quick hitch compatible Angle Frame and Box Frame Disc Harrows and the XB Sub-Compact Angle Frame Disc Harrow. Our Discs are built with the quality and features that will help turn your "dirt" into fertile "soil" for growing grass, vegetables, flowers, or any number of plants. Choose combination blades (notched front & smooth rear) for most applications. King Kutter Disc Harrows are also available with notched blades (front & rear) to manage heavy plant residue. King Kutter Disc Harrows are rugged. Heavy blades, precision bearings, tough angle frames or durable box frames and working widths of 4 1/2' to 7 1/2', ensure King Kutter has the right Disc Harrow for you.



- Cat. I quick hitch compatible 3-pt. hitch
- 16" or 18" Blades available
- Sizes 4 1/2', 5 1/2', & 6 1/2' working widths
- Angle frame construction
- · Sealed bearings
- · Bolt style gang angle adjustment

Model	Working Width	Approx. Weight
16-12-G-SB-N	4′ 6″	401 lbs.
16-12-G-SB-C	4′ 6″	405 lbs.
16-16-G-SB-N	5′ 6″	460 lbs.
16-16-G-SB-C	5′ 6″	466 lbs.
18-16-G-SB-N	5′ 6″	497 lbs.
18-16-G-SB-C	5′ 6″	502 lbs.
16-20-G-SB-N	6′ 6″	524 lbs.
16-20-G-SB-C	6′ 6″	529 lbs.
18-20-G-SB-N	6′ 6″	567 lbs.
18-20-G-SB-C	6′ 6″	592 lbs.



Angle Frame Disc Harrows

el	Working Width	Approx. Weight
-G-CBF	5′ 6″	764 lbs.
-G-NBF	5′ 6″	735 lbs.
-G-CBF	6′ 6″	857 lbs.
-G-NBF	6′ 6″	823 lbs.
-G-CBF	6′ 6″	909 lbs.
-G-NBF	6′ 6″	874 lbs.
-G-CBF	7′ 6″	863 lbs.
-G-NBF	7′ 6″	830 lbs.
-G-CBF	7′ 6″	1012 lbs.
-G-NBF	7′ 6″	985 lbs.
	el G-G-CBF G-G-CBF D-G-NBF D-G-NBF D-G-CBF D-G-CBF D-G-CBF D-G-NBF	6-G-CBF 5' 6" 6-G-NBF 5' 6" 6-G-CBF 6' 6" 6-G-NBF 6' 6" 6-G-CBF 6' 6" 6-G-CBF 7' 6" 6-G-CBF 7' 6" 6-G-CBF 7' 6"








- Cat. I quick hitch compatible 3-pt. hitch
- 18" or 20" Blades available
- Sizes 5 1/2', 6 1/2', & 7 1/2' working widths
- Notched or combination blades

- Box frame construction
- Sealed bearings
- Single bolt gang angle adjustment

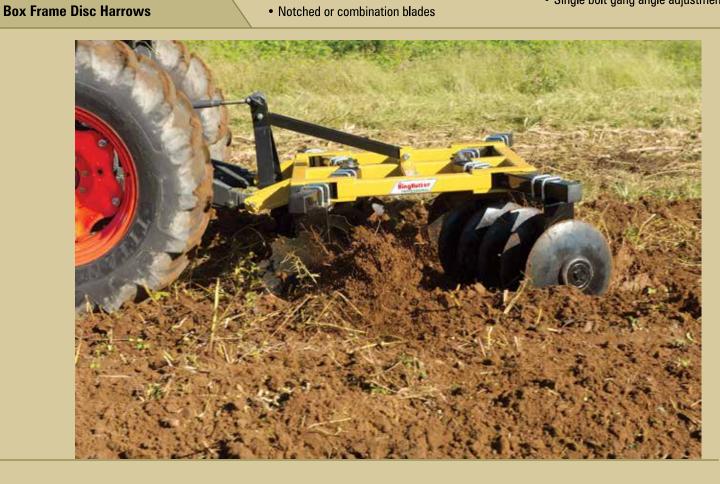



Every King Kutter Tiller is built to perform year after year. There's a certain satisfaction that comes from doing the job right. Whether you have tough sod, or hard compacted ground, King Kutter Gear Drive Rotary Tillers will get the job done. Producing an ideal soil mix is what King Kutter Tillers are all about. With six tines per flange, you can till down to eight inches. There are five models designed for your ground and your tractor. The 4' TG-48-XB is ideal for sub-compact tractors. The 4' TG-48 is ideal for 20 to 35 horse power tractors. The 5' TG-60 model is designed for the most popular compact tractors in the 25 to 40 horse power range. Choose the 6' TG-72 model for tractors with 35 to 50 horse power. The 7' TG-84 is perfect for larger operations and ideal for use on tractors from 50 to 65 horse power. The choice is yours, seven quality Gear Drive Rotary Tillers that are built tough and will give you years of dependable performance. The 5' and 6' models are available in reverse rotation models.

Model	Working Width	Approx. Weight
TG-48	48"	569 lbs.
TG-60	60"	630 lbs.
TG-72	72"	721 l bs.
TG-84	84"	805 lbs.
RTG-60	60"	693 lbs.
RTG-72	72"	770 l bs.




Gear Drive Rotary Tillers

- · All gear drive
- · Six tines per flange
- 36 tines on TG-48
- 42 tines on TG-60 & RTG-60
- 54 tines on TG-72 & RTG-72
- · Cat. I, 3-pt. hitch
- · Patented kick stand
- · Slip clutch protection standard
- · Adjustable skid shoes
- · HD Reinforced and gusseted frame



Why Gear Drive?

Dependable performance and low maintenance.

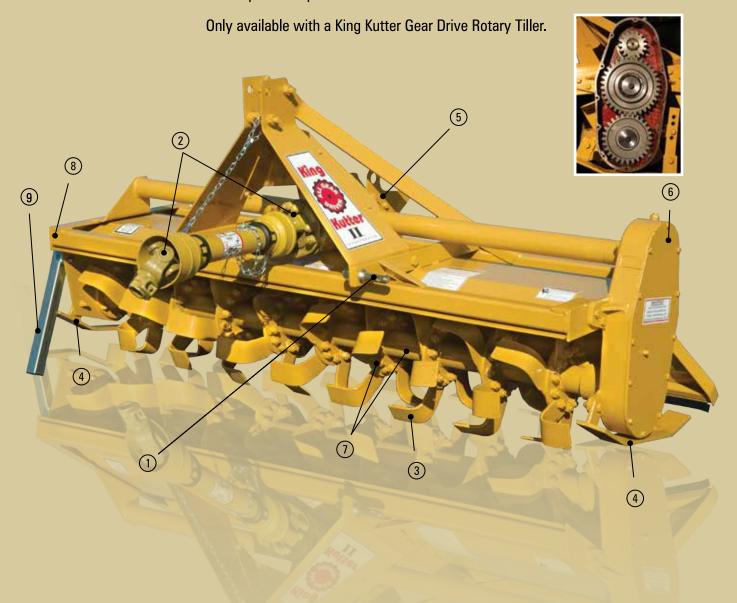

Gear Drive. More Tines. Better Tilling.

- 1 Cat. I Hitch
 - Cat. I + II Hitch on TG84
- 2 Slip Clutch Drive Line
- 3 Six Tines Per Flange
- 4 Adjustable Skid Shoes

- 5 Cast Iron Center Gearbox
- 6 Cast Iron Gear Drive Side Gearbox
- 7 Heavy Duty Rotor Bar and Flanges
- 8 Heavy Duty Square Tube Frame
- 9 Standard Kick Stand

Move trailers, lift pallets, carry anything or unroll wire with King Kutter Specialty Equipment. We have Trailer Movers, Pallet Movers, Carry Alls, and Wire Un-Rollers to help you get tough jobs done around your acreage or farm.

Model Approx. Weight CA 97 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 20 Pre-drilled mounting holes (10 per side)
- 1,000 lb. lift capacity
- HD Angle iron construction
- * Boards not included





Carry All

20



Model Approx. Weight
TM 67 lbs.
TM-GN 76 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- TM-GN Has goose neck ball and 2" receiver hitch
- TM Has 2" receiver hitch only
- Square and rectangular tube frame



Trailer Movers

21

Approx. Weight

PM-15

158 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- Beveled square tube forks
- 2,000 lbs. Lift capacity
- Square and rectangular tube frame



Pallet Mover





Model Approx. Weight WU-R 20 lbs.

- ATV Mount standard
- Fits 2" receiver hitch
- Converts to 3-pt. hitch model when used in conjunction with TM or TM-GN trailer movers (as shown)



Wire Unroller

Model Approx. Weight RS-500 103 lbs.

- Cat. I or II step up pin straddle hitch
- Specially designed penetrator spear
- Standard bale stabilizer points
- Rated for bales up to 2,000 lbs.

3-pt. Spear







22

Model Approx. Weight BS-325 90 lbs.

- Loader bucket attachment
- Specially designed penetrator spear
- Standard bale stabilizer points
- Rated for bales up to 2,000 lbs.



Bucket Spike

23

Model

Approx. Weight

E-511 191 lbs.

- · Cat. I or II step up pin straddle hitch
- Specially designed tapered forks minimize bale and field damage
- Rated for bales up to 2,000 lbs.

Bale Mover





Approx. Weight Model F-602 204 lbs.

- Unique universal hitch will accept Cat. I or Cat. II, 3-pt. hitch or mount to most front loaders
- Rated for bales up to 2,000 lbs.
- Specially designed penetrator spear
- Standard bale stabilizer points

Universal Bale Spear

Approx. Weight Model SSS 200 lbs.

- · Skid steer mount
- Rated for bales up to 2,000 lbs.
- Specially designed penetrator spear
- Standard bale stabilizer points





- Limited Cat. I, 3-pt. hitch
- All gear drive gearboxes
- Six tines per flange
- Adjustable skid shoes
- · Patented kick stand
- Slip clutch PTO protection
- Adjustable tailgate




XB Gear Drive Rotary Tiller



Model Approx. Weight 1.5T-DT-XB 864 lbs.

- 1 1/2 Ton capacity
- Walking tandem axles
- 2 Way opening tailgate
- Manual hydraulic pump
- Single acting cylinder
- Swivel clevis hitch
- Bed dimensions: 50" W x 70" L x 13" H
- Removable side and end panels
- 55° Rear dump angle
- 2" Ball hitch





24

25

Model Working Width Approx. Weight L-48-40-XB 48" 422 lbs.

- · Limited Cat. I, 3-pt. hitch
- One piece top deck
- Rugged steel side rails
- Shear pin shielded PTO shaft
- Cast iron gearbox
- Dual tail wheels
- Round stump jumper
- Heat treated blades



XB Rotary Kutter



Model Working Width Approx. Weight RFM-48-XB 48" 424 lbs.

- Limited Cat. I, 3-pt flex hitch
- 3/16" Thick steel deck
- 3 Blade spindles
- 4 Solid tires
- 1" 4 1/2" Mowing height
- Single V-belt with manual spring tensioner



XB Finish Mower

Model Working Width BB-48-XB 48"

Approx. Weight 292 lbs.

- Limited Cat. I, 3-pt. hitch
- 2" x 4" Ripper shank tube
- Flip up ripper shanks
- Front and rear cutting edges





4' XB Box Blade



Model Working Width Approx. Weight TRB-60-XB 60" 191 lbs.

- · Limited Cat. I, 3-pt. hitch
- 10" Tall moldboard
- Reversible cutting edge
- Five forward and reverse angle settings

5' XB Rear Blade

Model Working Width Approx. Weight TYR-60-XB 60" 191 lbs.

- · Limited Cat. I, 3-pt. hitch
- · Reinforced tubular frame
- · Adjustable tine stabilizer
- Five forward and reverse angle settings



5' XB Landscape Rake

26

Model Working Width Approx. Weight 14-16-SB-N-XB 5' 418 lbs.

- · Limited Cat. I, 3-pt. hitch
- Sealed bearings
- 14" Notched blades
- Bolt type adjustable gang angle settings
- Cast iron bearing caps and spools

5' XB Angle Frame Disc



Model Working Width Approx. Weight

MB-S-XB 1 Furrower/ 1 Ripper tooth 40 lbs.



- Limited Cat. I, 3-pt hitch
- · Heat treated furrower and sub-soiler point

XB Middle Buster / Sub-Soiler



Model Working Width Approx. Weight DS-24-XB 24" 227 lbs.

- Limited Cat. I, 3-pt. hitch
- · Beveled cutting edge
- Angle frame construction
- Self-leveling pan
- Forward or reverse mount
- 24" Pan

24" XB Reversible Dirt Scoop

Model Lift Capacity Approx. Weight CA-XB Up to 400 lbs. 76 lbs.



- Limited Cat. I, 3-pt hitch
- Angle frame with pre-drilled holes

*Boards not included

XB Carry All

27

28

Spread salt and sand in the winter or fertilizer and seed in the spring with King Kutter's Seeder/Spreaders. With four different Seeder/Spreader options, from poly hoppers or steel hoppers, to sub-compact and pull type models, we have the right spreader for the job. So whether you're planting a wildlife food plot or over-seeding the lawn, King Kutter offers a wide variety of Seeder/Spreaders.

Model Approx. Weight S-XB 118 lbs.

- · Limited Cat. I, 3-pt. hitch
- · Gearbox with shielded driveline
- · Uniform spreading
- · Balanced distribution with four fins
- Up to 400 lb. capacity
- Upper and lower agitator
- Two control levers for spreading rate

XB Mini-Spreader



Model Approx. Weight S-ATV-180 179 lbs.

- · Adjustable height tow hitch
- 1 7/8" Ball hitch
- Turf tires
- · Wind drift shield



ATV Seeder / Spreader



Model Approx. Weight S-400-P 119 lbs.

- Cat. I, 3-pt. hitch
- · Gearbox with shielded driveline
- · Uniform spreading
- Adjustable spreading rates
- Choice of three spreading patterns
- Up to 800 lb. capacity
- · Seamless conical polyethylene hopper
- Upper and lower agitator

Seeder / Spreader (Polyethylene)

Model Approx. Weight S-500 122 lbs.

- Cat. I, 3-pt. hitch
- · Gearbox with shielded driveline
- · Uniform spreading
- Adjustable spreading rates
- Choice of three spreading patterns
- Up to 900 lb. capacity
- Seamless conical steel hopper
- Upper and lower agitator



Seeder / Spreader (Steel)



Model Working Width Approx. Weight KP-48-ATV 48" 307 lbs.

- 1 7/8" Ball hitch
- 3/16" Thick steel frame
- 48" Working width
- Flip over design
- 21 Individual cast iron packer wheels
- Greasable wheel shaft bearings

Kulti-Packer









Model Working Width Approx. Weight 16-8-CDF 48" 309 lbs.

- 3" Square tube frame
- 16" Notched blades
- 48" Cutting width
- 1 7/8" Ball hitch
- Rear receiver hitch to pull a Kulti-Packer or S-ATV-180 Seeder / Spreader

Flip Over Disc





Adjust Tongue Height
& Manage Cutting Depth



Model Working Width Approx. Weight 14-10-CD 33" 235 lbs.

- 1 7/8" Ball hitch
- 1" Square gang axle
- · Sealed bearings
- 14" Notched blades
- Depth control with jack
- 33" Working width

33" ATV Disc

Model Working Width
14-14-CD 48"

Approx. Weight 305 lbs.

- 1 7/8" Ball hitch
- 1" Square gang axle
- · Sealed bearings
- 14" Notched blades
- Depth control with jack
- 48" Working width



48" ATV Disc



Model Working Width Approx. Weight AR-72 72" 752 lbs.

- Cat. I & II, 3-pt. hitch
- 15 High vibration tines
- · Adjustable smoother bar
- Adjustable rolling basket
- The only Arena Renovator that is fully adjustable without the use of tools





Arena Renovator

King Kutter's Rotary Harrows have been designed with sleeve mounted, drive-in, spot welded spikes, to increase strength, performance, and durability. They're easy to use, and no tractor PTO is required. The unique turning action allows the harrow to level soil by redistributing it inward. They are ideal for use in orchards and vineyards to control weeds without the use of chemicals, to prepare seedbeds for planting, and to groom riding arenas.



Model	Working Width	Approx. Weight
RH-60	60"	323 lbs.
RH-72	72"	355 lbs.
RH-84	84"	401 lbs.

Quick Hitch Compatible

- · Cat. I quick hitch compatible 3-pt. hitch
- · Bolt on hub with sealed bearings
- Sleeve mounted, drive-in, spot welded spikes
- No PTO shaft required to operate
- · Heavy duty reinforced frame

Rotary Harrows

lodel	Working Width	Approx. Weight
H-48	48"	99 lbs.
H-96	96"	191 lbs.

· Pull chain hitch

M Di

Dŀ

- 1/2" Diameter offset tines
- · No parts to lubricate or adjust



Drag Harrows



Rely on Genuine King Kutter parts.

At King Kutter Incorporated we pride ourselves on our Parts & Service after the sale. Genuine replacement parts are readily available through our network of dealers throughout the country, and direct from King Kutter at (205) 487-3202 or via our interactive website, www.kingkutter.com. Whether you need blades for your Rotary Kutter, tines for your Rotary Tiller, ripper shanks for your Box Blade, or any other parts for your King Kutter equipment, you can count on us to have what you need.









KING REPORATED


























Want to know more? Refer to one of our 12 individual equipment brochures.



PO Box 1200 Winfield, AL 35594

205.487.3202 www.kingkutter.com

King Kutter, Inc. reserves the right to change model numbers, optional equipment and product specifications without notice.

Manufactures of Quality Rotary Mowers & Farm Equipment