



Quality Rotary Mowers & Farm Equipment

King Kutter Inc. has been manufacturing quality mowers and farm equipment since the 1960's in northwest Alabama. Through the years the product line has expanded and evolved to encompass many products, to the point where King Kutter Inc. is considered an industry leader in farm equipment, specializing in rotary Cutters, gear driven rotary tillers, and landscape equipment.

Page #**Products**

3	Flex Hitch Rotary Cutters
4	Rotary Cutters
5	Pull Type and Heavy Duty Rotary Cutters
6	Post Hole Digger & Lift Kulti-Packer
7	Dual Edge Land Graders & Dirt Scoop
8	Box Blades
9	Landscape Rakes
10 - 12	Rear Blades
13	Finish Mowers
14	Disc Bedder, "C" Tine Cultivator & Field Cultivator
15	Middle Buster, & Sub-Soilers
16 - 17	Disc Harrows
18 - 19	Gear Drive Rotary Tillers
20	Carry All & Trailer Movers
21	Pallet Mover & Wire Unroller
22 - 23	Hay Moving Equipment
24 - 27	XB Sub-Compact Equipment
28 - 29	Seeder / Spreaders
30 - 31	ATV Equipment
32 - 33	Arena Renovator, Stump Cutters & Drag Harrows
34 - 35	King Kutter Parts & Product Brochures

King Kutter Inc.

PO Box 1200

Winfield, AL 35594

205.487.3202

www.kingkutter.com

King Kutter has many Cat. I Quick Hitch Compatible products. Just look for this icon to find one of the many Quick Hitch Compatible products available from King Kutter.

Quick Hitch
Compatible




King Kutter[®]
INCORPORATED





King Kutter’s Flex Hitch Rotary Cutter demonstrates the latest in Rotary Cutter innovation, and it’s only available from King Kutter Inc. The Cat. I quick hitchable, flex hitch design, is unlike anything on the market today. The unique hitch allows it to roll 15° up or down, on the left or right side of the machine. This feature allows the Flex Hitch Rotary Cutter to follow the contours of your field like no Rotary Cutter before. The domed deck design sheds water and debris to prevent material from collecting on the deck. Whether mowing pastures, roadsides, parks, or easements, the King Kutter Flex Hitch Rotary Cutter is perfect for you.

- Cat. I quick hitch compatible flex hitch
- “I” Beam side rails (except stainless)
- Laminated tail wheel
- 40 HP cast iron gearbox
- Shear pin PTO shaft protection
- Slip clutch optional
- 12 Gauge domed deck design
- Stainless steel deck model available
- 1/2” x 3” Free swinging blades
- Stump jumper



The Flex Hitch Rotary Cutter is truly quick hitch compatible, and accepts most Cat. I quick hitch systems, making this the easiest Rotary Cutter on the market to hook up.

Quick Hitch Compatible



*Shown with optional chain guards

Model	Working Width	Gearbox HP	Approx. Weight
L-48-40-P-FH	48"	40 HP	470 lbs.
L-60-40-P-FH	60"	40 HP	557 lbs.
L-60-40-SC-FH	60"	40 HP	581 lbs.
L-60-40-SS-FH	60"	40 HP	565 lbs.
L-72-40-P6-FH	72"	40 HP	664 lbs.
L-72-40-SC-P6-FH	72"	40 HP	691 lbs.



King Cutter's Rotary Cutters are quality constructed, durable Cutters that are built to last. They are made with rugged "I" beam side rails, and a single sheet top deck that is fully reinforced with cross and spider bracing. A rugged gearbox and stump jumper, adjustable laminated tail wheel, and shielded PTO shaft will provide years of service. These Cutters are available as lift type or pull type



- Cat 1, 3-pt hitch
- "I" Beam side rails
- Laminated tail wheel
- 40 or 60 HP cast iron gearboxes
- Shear pin PTO protection
- Slip clutch optional
- 12 Gauge deck (48", & 60" models)
- 10 Gauge deck (72" models)
- One piece top deck
- 1/2" x 3" Free swinging blades
- Stump jumper

Model	Working Width	Gearbox HP	Approx. Weight
L-48-40-P	48"	40 HP	428 lbs.
L-60-40-P	60"	40 HP	515 lbs.
L-60-40-SC	60"	40 HP	531 lbs.
L-72-40-P	72"	40 HP	685 lbs.
L-72-40-P6	72"	40 HP	659 lbs.
L-72-40-SC	72"	40 HP	709 lbs.
L-72-40-SC-P6	72"	40 HP	695 lbs.
L-72-60-P	72"	60 HP	729 lbs.
L-72-60-P6	72"	60 HP	704 lbs.
L-72-60-SC	72"	60 HP	741 lbs.
L-72-60-SC-P6	72"	60 HP	714 lbs.



King Cutter’s Heavy Duty Rotary Cutters are designed to meet the demands of today's farmer. This Cutter is built to perform. Durable, heavy-gauge 8” “ I ” beam side rails, and a fully reinforced 3/16” thick top-deck will stand up to tough conditions. HD gearboxes, slip clutches, and dual laminated tail wheels (6 ft & 7 ft models) are features that are standard on King Cutter Heavy Duty Cutters.



Model	Working Width	Gearbox HP	Approx. Weight
L-60-60-HD	60"	60 HP	800 lbs.
L-72-60-HD	72"	60 HP	1217 lbs.
L-72-80-HD	72"	80 HP	1236 lbs.
L-84-60-HD	84"	60 HP	1516 lbs.
L-84-80-HD	84"	80 HP	1529 lbs.

- 60 & 80 HP gearboxes
- 3/16" Thick top deck
- Slip clutch PTO shaft protection
- "I" Beam side rails
- Dual laminated tail wheels (6 & 7 ft models)
- Stump jumper
- Easy tail wheel adjustment

Heavy Duty Rotary Cutters

Model	Working Width	Gearbox HP	Approx. Weight
P-60-40-P	60"	40 HP	575 lbs.

- "I" Beam side rails
- One piece top sheet
- Stump jumper
- Heavy duty, cast iron gearbox
- Easy height adjustment
- Pull tongue design



Pull Type Rotary Cutter



Landscape your property, build and maintain roads, move piles of dirt, or prepare to lay sod with King Kutter Landscaping Equipment. King Kutter Box Blades, Landscape Rakes, Dirt Scoops, Dual Edge Land Graders, and Kulti-packers are designed, built, and manufactured to last. We have four styles of Box Blades including the standard BB Series, the Professional and Hinged Back models, and the XB Sub Compact units. King Kutter also has three styles of Landscape Rakes. The Tubular Framed models, which feature our patented kickstand, a Professional series, and the XB models designed specifically for Sub-Compact tractors. The Dual Edge Land Graders are available in three sizes and King Kutter's 3-pt. mounted Kulti-packer is available in a 72" working width. The Dirt Scoop rounds out the line. Whether you are building a flower bed, preparing your lawn for grass, or fixing the potholes in your driveway, King Kutter has the tool for you.



Post Hole Diggers

Model	Auger Size	HP	Boom O.D.	Approx. Weight
PHD-06-SC	6"	20-50	2-1/2" SQ.	225 lbs.
PHD-09-SC	9"	20-50	2-1/2" SQ.	245 lbs.
PHD-12-SC	12"	20-50	2-1/2" SQ.	255 lbs.

- 3 Auger sizes 6", 9" or 12" with Butterfly Flighting
- Quik-Tach™, Threaded Auger
- Replaceable, Cast Steel, Split Tip Auger Point
- Replaceable, Heat Treated, Cutting Edges
- Square Tube Formed Frame
- PTO with Slip Clutch
- Accommodates Cat. I, 3-Point Hitch
- Safety Shield Integrated into structure



Model	Working Width	Approx. Weight
DEG-60	60"	447 lbs.
DEG-72	72"	491 lbs.
DEG-84	84"	540 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 1/2" thick replaceable wear pads
- Two reversible cutting edges
- Flat steel, angle, and tube frame

Dual Edge Land Graders



Model	Working Width	Approx. Weight
KP-72	72"	508 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 31 Cast iron packer wheels
- Sealed bearings
- Parking stands
- Built in weight box

Kulti-Packer



Model	Working Width	Approx. Weight
DS-30	30"	269 lbs.

- Cat. I 3-pt. hitch
- HD Angle frame construction
- Forward or reverse attachment
- Trip lever dump

Dirt Scoop



Model	Working Width	Approx. Weight
BB-48	48"	372 lbs.
BB-60	60"	441 lbs.
BB-66	66"	471 lbs.
BB-72	72"	500 lbs.
BB-84	84"	550 lbs.
BB-96	96"	604 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- All welded plate hitch frame
- 1/4" Rounded end plates
- 4" x 4" Square box shank housing
- Four position adjustable scarifiers
- Two 1/2" x 6" reversible cutting edges
- Replaceable scarifier points



Box Blades

QuickHitch
Compatible



Model	Working Width	Approx. Weight
BB-G-48	48"	384 lbs.
BB-G-54	54"	418 lbs.
BB-G-60	60"	447 lbs.
BB-G-66	66"	479 lbs.
BB-G-72	72"	510 lbs.
BB-G-84	84"	573 lbs.
BB-G-96	96"	670 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- All welded 3/8" plate hitch frame
- 1/4" Rounded end plates
- 4" x 4" Square box shank housing
- Four position adjustable scarifiers
- Two 1/2" x 6" reversible cutting edges
- Replaceable scarifier points

QuickHitch
Compatible

Professional Box Blades

Model	Working Width	Approx. Weight
H-BB-60	60"	502 lbs.
H-BB-72	72"	565 lbs.
H-BB-84	84"	622 lbs.
H-BB-96	96"	685 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- All welded 3/8" plate hitch frame
- 1/4" Rounded end plates
- 4" x 4" Square box shank housing
- Four position adjustable scarifiers
- Two 1/2" x 6" reversible cutting edges
- Replaceable scarifier points
- Hinged rear cutting edge for better penetration

Hinged Back Box Blades

QuickHitch
Compatible



Model	Working Width	Approx. Weight
YR-G-60	60"	223 lbs.
YR-G-72	72"	239 lbs.
YR-G-84	84"	265 lbs.
YR-G-96	96"	290 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- Five forward & reverse angle settings
- 5/16" x 1" Heat treated spring steel tines
- Tines individually attached - 1" spacing
- Industrial tube frame
- 3" x 3" Angle beam tine frame
- Optional gauge wheels
- Adjustable tine stabilizer bar

Professional Landscape Rakes



Model	Working Width	Approx. Weight
TYR-60	60"	218 lbs.
TYR-72	72"	250 lbs.
TYR-84	84"	271 lbs.
TYR-96	96"	305 lbs.

- Five forward & reverse angle settings
- 5/16" x 1" Heat treated spring steel tines
- Industrial tube frame
- TYR-96 features a reinforced tubular frame
- Cat. I, 3-pt. hitch
- 3" x 3" Angle beam tine frame
- Optional gauge wheels
- Patented kick stand



Tubular Frame Landscape Rakes



Maintaining your driveway, moving snow, or any number of dirt working applications are a breeze with a King Kutter Rear Blade. We have the right blade for your needs: the quick hitch compatible industrial tube frame TRB, RB-G, PRB, 5500-RMB and RB-QAT or our heavy duty gusseted reinforced HD-RB Series, King Kutter Rear Blades are built with the quality and features that will make those hard jobs go quickly. Need to build a road? King Kutter's RB-QAT 84" Rear Blade provides the strength and versatility to help you build a road to the back acreage of your property. No matter which King Kutter Rear Blade you choose, rest assured that it will have the quality and features you need.

Model	Working Width	Approx. Weight
TRB-60	60"	227 lbs.
TRB-72	72"	250 lbs.
TRB-84	84"	269 lbs.

- Cat. I quick hitch compatible 3-pt hitch
- Five forward & reverse angle settings
- 14" Tall moldboard
- Reversible cutting edge (1/2" x 6")
- Reinforced tube frame with gussets
- Patented kick stand



Tubular Frame Rear Blades



Model	Working Width	Approx. Weight
RB-G-60	60"	221 lbs.
RB-G-72	72"	242 lbs.
RB-G-84	84"	260 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 1/2" x 6" Reversible cutting edge
- Five forward & reverse angle settings
- Industrial tube frame
- 14" Specially formed reinforced moldboard



Professional RB-G Rear Blades



Model	Working Width	Approx. Weight
PRB-72	72"	330 lbs.
PRB-84	84"	359 lbs.
PRB-96	96"	386 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 1/2" x 6" Reversible cutting edge
- Seven forward & five reverse angle settings
- Easy adjust angle, tilt & offset
- 14" Specially formed reinforced moldboard



PRB Rear Blades



King Kutter's PRB Professional Rear Blades are designed for dependable performance on the tough jobs. The offset and tilt features, in conjunction with the industrial tube frame, make this a great blade for road ditch and driveway maintenance. The special formed moldboard and reinforced back bracing provide extra strength and performance.



Model	Working Width	Approx. Weight
RB-84-QAT	84"	389 lbs.

- Cat. I quick hitch compatible 3-pt hitch
- Five forward & reverse angle settings
- 14" Tall moldboard
- Reversible cutting edge (1/2" x 6")
- Reinforced tube frame with gussets
- Patented kick stand
- Easy tilt & angle settings



RB-QAT Rear Blade





King Kutter's 5500 Series Rear Blades are designed for a variety of uses. The 5500 is one of the best general purpose blades on the market and is designed to perform with less power. This blade is easy to adjust with manual offset, angle, and tilt functions.

- Cat. I or II step up pin straddle hitch
- Replaceable cutting edge, reversible
- Reversible 5/16" x 15-1/4" curved moldboard
- Heavy 4"x4"x3/8" main tube
- Manual pin adjustment

Model	Working Width	Approx. Weight
5500-RMB-72	72"	485 lbs.
5500-RMB-84	84"	510 lbs.
5500-RMB-96	96"	535 lbs.



King Kutter's HD-RB Heavy Duty Rear Blades are engineered to be dependable on the really tough jobs. They are great for dirt work, road maintenance, ditching, cleaning livestock pens, and much more. This series features a specially formed moldboard with reinforced back bracing for added strength and performance.

Model	Working Width	Approx. Weight
HD-RB-72	72"	569 lbs.
HD-RB-84	84"	611 lbs.
HD-RB-96	96"	636 lbs.

- Cat. I, 3-pt. hitch
- 1/2" x 6" reversible cutting edge
- Five forward & reverse angle settings
- HD Tube & angle frame with gussets
- 14" specially formed reinforced moldboard

Heavy Duty Rear Blades



The grass will look better on your side of the fence when you cut it with a King Kutter Finish Mower. King Kutter Finish Mowers are built with the quality and features you expect from King Kutter. Mowing has never been easier because of the *free-floating flex hitch system* which will follow the contour of the ground.



Model	Working Width	Approx. Weight
RFM-48	48"	424 lbs.
RFM-60	60"	554 lbs.
RFM-72	72"	590 lbs.
RSFM-72*	72"	605 lbs.
RSFM-SS-84-FH*	84"	645 lbs.

* Double V-belt models



QuickHitch
Compatible



*Only Stainless Steel Finish Mower on the Market

- HD Cast iron gearbox
- Easy height adjustment
- Baffled deck
- 7' Model available with stainless steel deck only
- Free floating flex hitch system

QuickHitch
Compatible



Plow your garden. Prepare the soil to plant. Make furrows to plant potatoes. Cultivate your sweet corn patch. Loosen compacted soil. Renovate and dethatch pastures. King Kutter's Tillage Tools are the best the industry has to offer for landscapers, contractors, and farmers with large gardens or small acreages.



The King Kutter Disc Bedder allows adjustment of the discs to virtually any row width up to 48". The 48" square tube toolbar allows the bedder shanks to slide for widening or narrowing the bed. This Disc Bedder features a Cat. I quick hitchable, 3-point hitch and is ideal for home gardeners, vegetable growers and farmers.

- Cat. I quick hitch compatible 3-pt. hitch
- Adjustable row widths
- Sealed bearings
- 16" Adjustable shanks
- 14" Disc Blades with adjustable angle & width



Model	Working Width	Approx. Weight
DB	Up to 48"	110 lbs.

Disc Bedder



- Cat. I quick hitch compatible 3-pt. hitch
- Adjustable row widths
- Reversible heat treated points
- Spring steel "C" tines
- Heavy duty angle frame



Model	Working Width	Approx. Weight
CV-G-1-C	54"	122 lbs.



"C" Tine Cultivator

Model	Working Width	Approx. Weight
FCV-72-D	72"	292 lbs.

- 13 High vibration Danish "S" tines
- Cat. I quick hitch compatible, straddle hitch
- Reversible points
- Tubular frame



Field Cultivator



Model	Working Width	Approx. Weight
SUB	1 Ripper Shank	101 lbs.



- Cat. I quick hitch compatible 3-pt. hitch
- Solid steel shank
- Forged lift pins
- Heavy duty steel frame
- Heat treated reversible ripper tooth



Sub-Soiler

Model	Working Width	Approx. Weight
HD-SUB	1 Ripper Shank	285 lbs.

- Cat. I or II step up pin straddle hitch
- Solid steel shank
- Heavy duty steel frame
- Heat treated point
- Integrated storage stand



Heavy Duty Sub-Soiler

Model	Working Width	Approx. Weight
MB	1 Furrower	90 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- Solid steel shank
- Forged lift pins
- Heavy duty steel frame
- 14" heat treated furrower



Middle Buster





Tough field conditions demand a tough King Kutter Disc Harrow. We have three styles to choose from, the quick hitch compatible Angle Frame and Box Frame Disc Harrows and the XB Sub-Compact Angle Frame Disc Harrow. Our Discs are built with the quality and features that will help turn your “dirt” into fertile “soil” for growing grass, vegetables, flowers, or any number of plants. Choose combination blades (notched front & smooth rear) for most applications. King Kutter Disc Harrows are also available with notched blades (front & rear) to manage heavy plant residue. King Kutter Disc Harrows are rugged. Heavy blades, precision bearings, tough angle frames or durable box frames and working widths of 4 1/2’ to 7 1/2’, ensure King Kutter has the right Disc Harrow for you.



- Cat. I quick hitch compatible 3-pt. hitch
- 16” or 18” Blades available
- Sizes 4 1/2’, 5 1/2’, & 6 1/2’ working widths
- Angle frame construction
- Sealed bearings
- Bolt style gang angle adjustment



Angle Frame Disc Harrows



Model	Working Width	Approx. Weight
18-16-G-CBF	5' 6"	764 lbs.
18-16-G-NBF	5' 6"	735 lbs.
18-20-G-CBF	6' 6"	857 lbs.
18-20-G-NBF	6' 6"	823 lbs.
20-20-G-CBF	6' 6"	909 lbs.
20-20-G-NBF	6' 6"	874 lbs.
18-24-G-CBF	7' 6"	863 lbs.
18-24-G-NBF	7' 6"	830 lbs.
20-24-G-CBF	7' 6"	1012 lbs.
20-24-G-NBF	7' 6"	985 lbs.

Quick Hitch
Compatible



- Cat. I quick hitch compatible 3-pt. hitch
- 18" or 20" Blades available
- Sizes 5 1/2', 6 1/2', & 7 1/2' working widths
- Notched or combination blades
- Box frame construction
- Sealed bearings
- Single bolt gang angle adjustment

Box Frame Disc Harrows





Every King Kutter Tiller is built to perform year after year. There’s a certain satisfaction that comes from doing the job right. Whether you have tough sod, or hard compacted ground, King Kutter Gear Drive Rotary Tillers will get the job done. Producing an ideal soil mix is what King Kutter Tillers are all about. With six tines per flange, you can till down to eight inches. There are six models for your ground and your tractor. The 4’ TG-48-XB and the 54” TG-54-XBX are ideal for sub-compact tractors. The 4’ TG-48 is ideal for 20 to 35 horse poswer tractors. The 5’ TG-60model is designed for the most popular compact tractors in the 25 to 40 horse power range. Choose the 6’ TG-72 model for tractors with 35 to 50 horse power. The 7’ TG-84 is perfect for larger operations and ideal for use on tractors from 50 to 65 horse power. The choice is yours, sever quality Gear Drive Rotary Tillers that are built tough and will give you years of dependable performance. The 5’ and 6’ models are available in reverse rotation models.

Model	Working Width	Approx. Weight
TG-48-XB	48"	489 lbs.
TG-54-XBX	54"	520 lbs.
TG-48	48"	569 lbs.
TG-60	60"	630 lbs.
TG-72	72"	721 lbs.
TG-84	84"	805 lbs.
RTG-60	60"	693 lbs.
RTG-72	72"	770 lbs.

- All gear drive
- Six tines per flange
- 36 tines on TG-48
- 42 tines on TG-60 & RTG-60
- 54 tines on TG-72 & RTG-72
- 66 tines on TG-84
- Cat. I, 3-pt. hitch
- Patented kick stand
- Slip clutch protection standard
- Adjustable skid shoes
- HD Reinforced and gusseted frame



Gear Drive Rotary Tillers





NEW TG-84



Why Gear Drive?

Dependable performance and low maintenance.

Only available with a King Cutter Gear Drive Rotary Tiller.

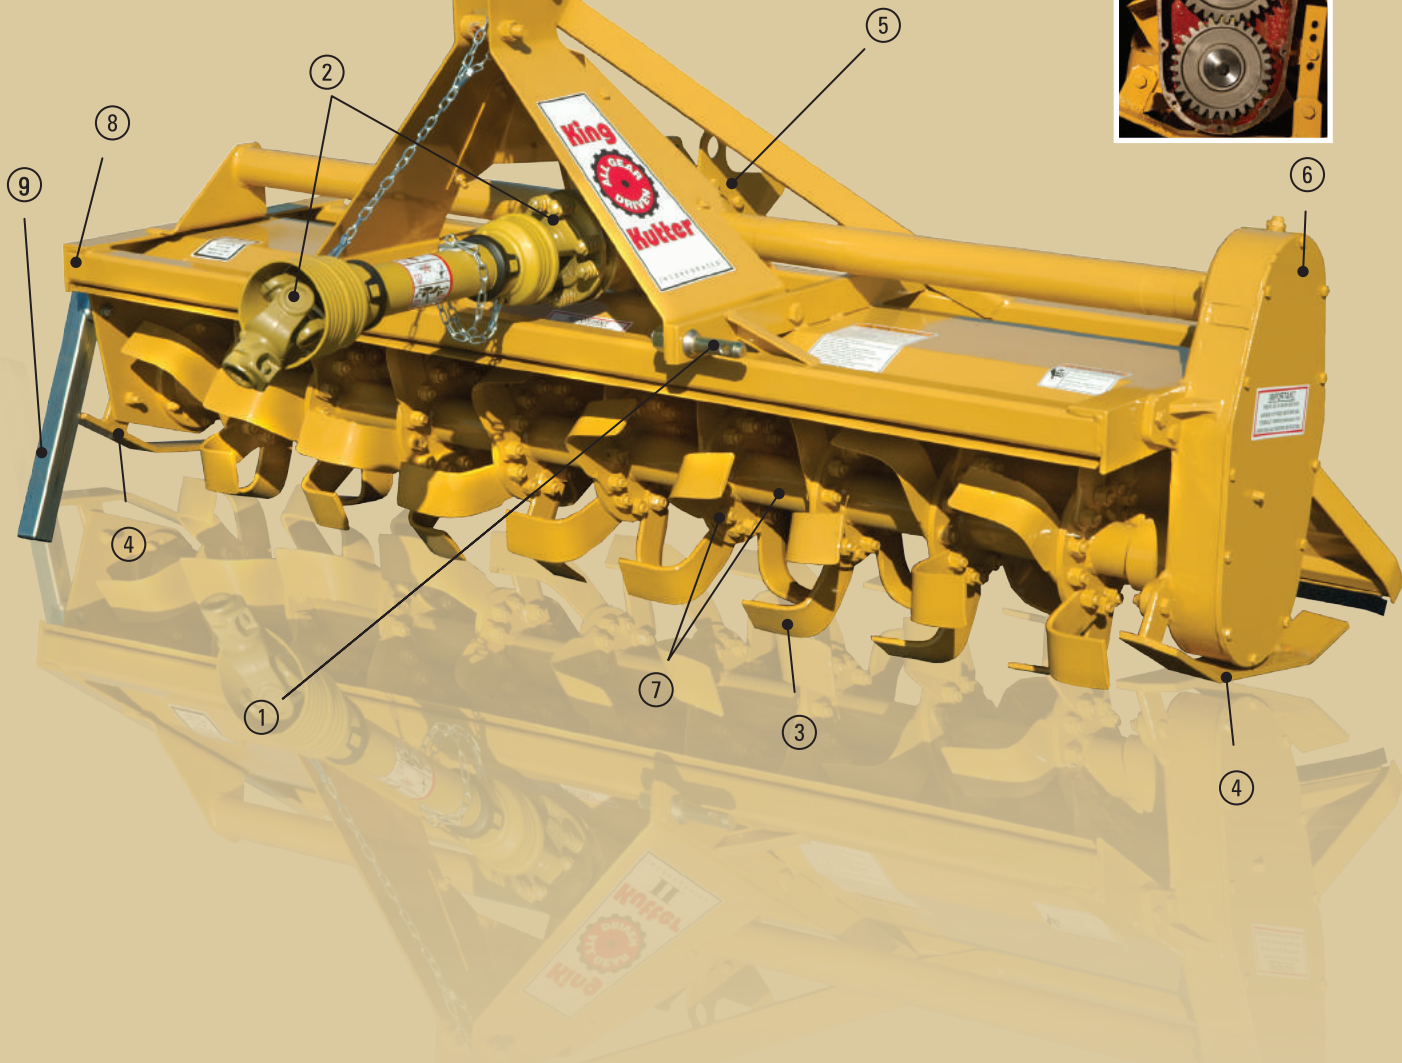

Gear Drive. More Tines. Better Tilling.

- | | | | |
|---|---------------------------|---|-----------------------------------|
| 1 | Cat. I Hitch | 5 | Cast Iron Center Gearbox |
| | Cat. I + II Hitch on TG84 | 6 | Cast Iron Gear Drive Side Gearbox |
| 2 | Slip Clutch Drive Line | 7 | Heavy Duty Rotor Bar and Flanges |
| 3 | Six Tines Per Flange | 8 | Heavy Duty Square Tube Frame |
| 4 | Adjustable Skid Shoes | 9 | Standard Kick Stand |

Move trailers, lift pallets, carry anything or unroll wire with King Kutter Specialty Equipment. We have Trailer Movers, Pallet Movers, Carry Alls, and Wire Un-Rollers to help you get tough jobs done around your acreage or farm.

Model	Approx. Weight
CA	97 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- 20 Pre-drilled mounting holes (10 per side)
- 1,000 lb. lift capacity
- HD Angle iron construction

** Boards not included*



Carry All



Model	Approx. Weight
TM	67 lbs.
TM-GN	76 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- TM-GN Has goose neck ball and 2" receiver hitch
- TM Has 2" receiver hitch only
- Square and rectangular tube frame



Trailer Movers



Model	Approx. Weight
PM-15	158 lbs.

- Cat. I quick hitch compatible 3-pt. hitch
- Beveled square tube forks
- 2,000 lbs. Lift capacity
- Square and rectangular tube frame

Pallet Mover



Model	Approx. Weight
WU-R	20 lbs.

- ATV Mount standard
- Fits 2" receiver hitch
- Converts to 3-pt. hitch model when used in conjunction with TM or TM-GN trailer movers (as shown)

Wire Unroller



Model	Approx. Weight
RS-500	103 lbs.

- Cat. I or II step up pin straddle hitch
- Specially designed penetrator spear
- Standard bale stabilizer points
- Rated for bales up to 2,000 lbs.

3-pt. Spear

QuickHitch
Compatible



Model	Approx. Weight
BS-325	90 lbs.

- Loader bucket attachment
- Specially designed penetrator spear
- Standard bale stabilizer points
- Rated for bales up to 2,000 lbs.

Bucket Spike



Model	Approx. Weight
E-511	191 lbs.

- Cat. I or II step up pin straddle hitch
- Specially designed tapered forks minimize bale and field damage
- Rated for bales up to 2,000 lbs.

Bale Mover



Model	Approx. Weight
F-602	204 lbs.

- Unique universal hitch will accept Cat. I or Cat. II, 3-pt. hitch or mount to most front loaders
- Rated for bales up to 2,000 lbs.
- Specially designed penetrator spear
- Standard bale stabilizer points

Universal Bale Spear

Penetrator Spear - Comes with spear, nut and sleeve. Works with RS-500, BS-325 and F-602 Bale Spears.

Part No.	Approx. Weight
171007	30 lbs.



Replacement Penetrator Spear





TG-54-XBX
54" XB Xtra Tiller

Model	Working Width	Approx. Weight
TG-48-XB	48"	489 lbs.
TG-54-XBX	54"	520 lbs.

- Limited Cat. I, 3-pt. hitch
- All gear drive gearboxes
- Six tines per flange
- Adjustable skid shoes
- Patented kick stand
- Slip clutch PTO protection
- Adjustable tailgate



XB & XBX Gear Drive Rotary Tiller



Model	Working Width	Approx. Weight
L-48-40-XB	48"	422 lbs.

- Limited Cat. I, 3-pt. hitch
- One piece top deck
- Rugged steel side rails
- Shear pin shielded PTO shaft
- Cast iron gearbox
- Dual tail wheels
- Round stump jumper
- Heat treated blades

XB Rotary Kutter



Model	Working Width	Approx. Weight
RFM-48-XB	48"	424 lbs.

- Limited Cat. I, 3-pt flex hitch
- 3/16" Thick steel deck
- 3 Blade spindles
- 4 Solid tires
- 1" - 4 1/2" Mowing height
- Single V-belt with manual spring tensioner

XB Finish Mower



Model	Working Width	Approx. Weight
BB-48-XB	48"	292 lbs.

- Limited Cat. I, 3-pt. hitch
- 2" x 4" Ripper shank tube
- Flip up ripper shanks
- Front and rear cutting edges



4' XB Box Blade



Model	Working Width	Approx. Weight
TRB-60-XB	60"	191 lbs.

- Limited Cat. I, 3-pt. hitch
- 10" Tall moldboard
- Reversible cutting edge
- Five forward and reverse angle settings

5' XB Rear Blade

Model	Working Width	Approx. Weight
TYR-60-XB	60"	191 lbs.

- Limited Cat. I, 3-pt. hitch
- Reinforced tubular frame
- Adjustable tine stabilizer
- Five forward and reverse angle settings

5' XB Landscape Rake



Model	Working Width	Approx. Weight
14-16-SB-N-XB	5'	418 lbs.

- Limited Cat. I, 3-pt. hitch
- Sealed bearings
- 14" Notched blades
- Bolt type adjustable gang angle settings
- Cast iron bearing caps and spools



5' XB Angle Frame Disc



Model	Working Width	Approx. Weight
MB-S-XB	1 Furrower/ 1 Ripper tooth	40 lbs.

- Limited Cat. I, 3-pt hitch
- Heat treated furrower and sub-soiler point

24" XB Reversible Dirt Scoop

Model	Approx. Weight
1.5-DT-XB	864 lbs.

- 1 1/2 Ton capacity
- Walking tandem axles
- 2 way opening tailgate
- Manual hydraulic pump
- Single acting cylinder
- Swivel clevis hitch
- Bed dimensions: 50" W x 70" L x 13" H
- 55" Rear dump angle
- 2" ball hitch



1.5 Ton XB Dump Trailer

Spread salt and sand in the winter or fertilizer and seed in the spring with King Kutter's Seeder/Spreaders. With four different Seeder/Spreader options, from poly hoppers or steel hoppers, to sub-compact and pull type models, we have the right spreader for the job. So whether you're planting a wildlife food plot or over-seeding the lawn, King Kutter offers a wide variety of Seeder/Spreaders.

Model	Approx. Weight
S-XB	118 lbs.

- Limited Cat. I, 3-pt. hitch
- Gearbox with shielded driveline
- Uniform spreading
- Balanced distribution with four fins
- Up to 400 lb. capacity
- Upper and lower agitator
- Two control levers for spreading rate

XB Mini-Spreader



Model	Approx. Weight
S-ATV-180	179 lbs.

- Adjustable height tow hitch
- 1 7/8" Ball hitch
- Turf tires
- Wind drift shield

ATV Seeder / Spreader





Model	Approx. Weight
S-400-P	119 lbs.

- Cat. I, 3-pt. hitch
- Gearbox with shielded driveline
- Uniform spreading
- Adjustable spreading rates
- Choice of three spreading patterns
- Up to 800 lb. capacity
- Seamless conical polyethylene hopper
- Upper and lower agitator

Seeder / Spreader (Polyethylene)

Model	Approx. Weight
S-500	122 lbs.

- Cat. I, 3-pt. hitch
- Gearbox with shielded driveline
- Uniform spreading
- Adjustable spreading rates
- Choice of three spreading patterns
- Up to 900 lb. capacity
- Seamless conical steel hopper
- Upper and lower agitator



Seeder / Spreader (Steel)



Model	Working Width	Approx. Weight
KP-48-ATV	48"	307 lbs.

- 1 7/8" Ball hitch
- 3/16" Thick steel frame
- 48" Working width
- Flip over design
- 21 Individual cast iron packer wheels
- Greasable wheel shaft bearings



Kulti-Packer



Model	Working Width	Approx. Weight
16-8-CDF	48"	309 lbs.

- 3" Square tube frame
- 16" Notched blades
- 48" Cutting width
- 1 7/8" Ball hitch
- Rear receiver hitch to pull a Kulti-Packer or S-ATV-180 Seeder / Spreader

Flip Over Disc





Adjust Tongue Height
& Manage Cutting Depth



Model	Working Width	Approx. Weight
14-10-CD	33"	235 lbs.

- 1 7/8" Ball hitch
- 1" Square gang axle
- Sealed bearings
- 14" Notched blades
- Depth control with jack
- 33" Working width

33" ATV Disc

Model	Working Width	Approx. Weight
14-14-CD	48"	305 lbs.

- 1 7/8" Ball hitch
- 1" Square gang axle
- Sealed bearings
- 14" Notched blades
- Depth control with jack
- 48" Working width

48" ATV Disc





32

Model	Working Width	Approx. Weight
AR-72	72"	752 lbs.

- Cat. I & II, 3-pt. hitch
- 15 High vibration tines
- Adjustable smoother bar
- Adjustable rolling basket
- The only Arena Renovator that is fully adjustable without the use of tools

QuickHitch
Compatible



Arena Renovator (AR-72)

Arena Renovator



You have seen stump grinders. Now check out the all new, Patent Pending, King Kutter Stump Cutter! It will change the way you think about stump removal. The innovative 30" diameter head engages a large area of the stump simultaneously. It drastically reduces the amount of time it takes to remove a stump, and therefore increases productivity. In fact, it can take a 30" diameter stump and cut it down 18" in less than 15 minutes, powered simply by the tractor's PTO. Heavy duty cam-type cut-out clutch, lift arm stabilization kit and storage stands come standard with the King Kutter Stump Cutter.



- Cat. II 3-pt. hitch
- Heavy duty cam-type PTO shaft



Hydraulic Top Link Recommended

Model	Hitch Category	Cutting Width	Approx. Weight
SK-30	Cat. II	30"	1444 lbs.

Stump Cutter

Model	Working Width	Approx. Weight
DH-48	48"	99 lbs.
DH-96	96"	191 lbs.

- Pull chain hitch
- 1/2" Diameter offset tines
- No parts to lubricate or adjust




Drag Harrows



Rely on Genuine King Cutter parts.

At King Cutter Incorporated we pride ourselves on our Parts & Service after the sale. Genuine replacement parts are readily available through our network of dealers throughout the country, and direct from King Cutter at (205) 487-3202 or via our interactive website, www.kingkutter.com. Whether you need blades for your Rotary Cutter, tines for your Rotary Tiller, ripper shanks for your Box Blade, or any other parts for your King Cutter equipment, you can count on us to have what you need.

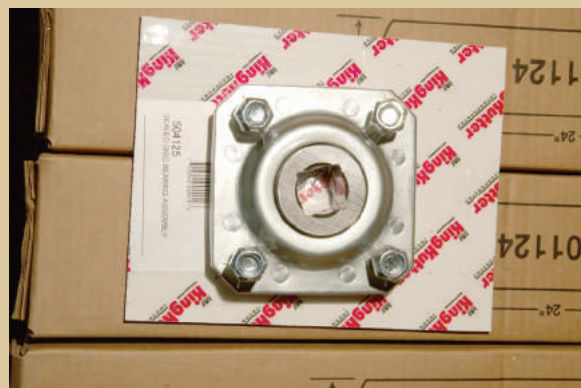

KingKutter® INCORPORATED



Want to know more? Refer to one of our 11 individual equipment brochures.



INCORPORATED

PO Box 1200
Winfield, AL 35594

205.487.3202
www.kingkutter.com

King Kutter, Inc. reserves the right to change model numbers,
optional equipment and product specifications without notice.

Manufactures of Quality Rotary Mowers & Farm Equipment